
ELECTRIC TRANSFORMERS AND INDUCTORS

since 1980

POWER FOR YOUR SISTEM

METH srl is designer and manufacturer of electric transformers since 1980 focusing on the quality of its product performance, thanks to decades of experience in this business. Since 1998 multiple national and international certifications are the result of a continuous effort in updating our products to meet worldwide standards and requirements.

METH is specialized in manufacturing **LV single-phase transformers from 3,2VA to 800kVA**, **LV/LV three-phase transformers and auto-transformers from 100 VA to 2000 kVA**, **MV/LV three-phase transformers up to 3150 kVA** and **three-phase reactors** for applications in different fields from industrial to automation to photovoltaic to marine.

Depending on the configuration, METH transformers bear the European or North American Approvals such as UL, KEMA and ENEC and Middle East Approvals (CoC - ex SASO). Meth experience and technology allow to develop and manufacture in a short time new products to meet any customers' requests and to improve new production programs.



QUALITY Meth Quality System, ISO 9001:2015 certified since 1998, rules all the processes: customers and suppliers orders management, preliminary controls, manufacturing cycles, final tests, handling of non conformity. As further confirmation of the constant quality-research over the years, Meth has obtained the following certifications:

- UL-CSA for single phase transformers up to 10 kVA and for three-phase transformers up to 800 kVA. Meth is one of the few manufactures in Europe with UL-CSA LISTED certification.
- UL-CSA Insulation System class B-F-H.
- UL-CSA for three-phase transformers with approved box up to 500kVA.
- UL-CSA for three-phase auto-transformers with approved box up to 630kVA.
- ENEC-KEMA for single phase transformers up to 2 kVA.

Certification companies inspections are regularly scheduled, ensuring a constant quality level of the products.

PLANNING Meth obtains the transformers parameters that will be tested at the end of production, such as over-temperature, losses, performance, rigidity, insulation, induced voltage, ecc., using “RALE” calculation programs. During the calculation spacers and cooling channels are properly sized to assure a long and reliable service life.

PRODUCTION The entire manufacturing process is carried out internally: preliminary controls, automatic winding for small transformers and winding on machine for flat cable, copper or aluminium strip for bigger transformers, core-assembly and soaking or resin. At the end of production all transformers are tested internally with instruments according to ISO specifications and regularly calibrated in SIT centres.

TEST Meth transformers are 100% tested and test results are stored in Meth database and available on customers request. Meth test equipment allows to carry out all tests required by the standards. At the moment the equipment is available for the following tests: no-load losses, load losses, harmonic analysis, resistance, rigidity and insulation measurement, induced voltage, inrush current.



www.meth-group.com

Meth Kft is specialized in manufacturing **single-phase electric transformers and three-phase transformers from 30 VA to 100 kVA** for industrial and automation applications and **three-phase filter reactors**.

The Company is focused on the quality of product performance and deliveries in short time, empowered by the 30-year-experience gained in this business by Meth srl Italy.

Meth Kft performance is based on three statements which represent its core value: Technology and Customization, Dynamic Know-how and Cost Effectiveness. The production cycle refers to Meth srl Italy method and is based on three steps: planning, production, test.



DYNAMIC KNOW-HOW AND COST EFFECTIVENESS

Meth Kft is a dynamic and proactive company, focused on the quality of product performance and the optimization of delivery time. Thanks to technology efficiency and reduced cost line production Meth kft offers to own customers good products and competitive prices.

PLANNING All Meth Kft products are designed by technical dpt. using high-technology calculations programs like RALE for a proper evaluation of transformers electrical and technical features such as over-temperature, losses, performance, rigidity, insulation, induced voltage, dimensions and weight.

PRODUCTION The entire manufacturing process is carried out internally through a computerized production cycle. All the transformers are completely impregnated with resin. Preliminary check of raw materials and regular inspection of every single step during the production process are carried out to assure the best quality performance of the products.

TEST All Meth Kft transformers are tested internally at the end of the production process with routine tests. Test equipment allows to implement type tests required by the standards such as no-load losses, load losses, resistance, rigidity and insulation measurement, inrush current. Test results are stored in the Company database and available upon customer request.

FOCUS ON METH CERTIFICATIONS




Meth operates with a quality system in compliance with ISO 9001:2015 standards. This means that all production processes follow different quality standards to improve efficiency and effectiveness in products development and manufacturing in order to have the highest customer satisfaction.



UL is one of several companies approved to perform safety testing by the US federal agency Occupational Safety and Health Administration (OSHA)

File: E169331
File: E215141

www.ul.com

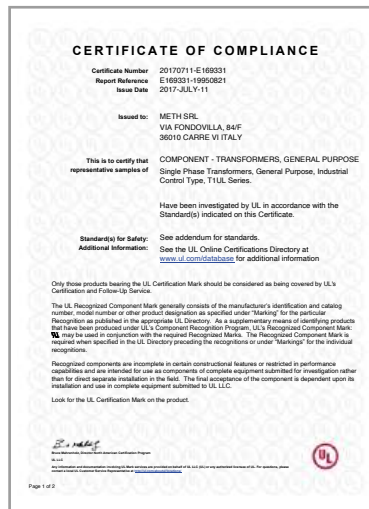

CE marking is the manufacturer's declaration that the product meets the requirements of the applicable EC directives. The CE marking is a symbol of free marketability in the European Economic Area (Internal Market)



Coc Certification (ex SASO) allows the company to export in Saudi Arabia market, as the products passed strict technical test in a certified laboratory



ENEC-KEMA is an abbreviation for "European Norms Electrical Certification". It gives customers the assurance that a product has been certified by one of the national certification institutes in Europe and it complies with the relevant European safety standards



Which certifies the products compliance with marine standards

38.01 /// THREE-PHASE TRANSFORMERS & AUTO-TRANSFORMERS

T3TULF T3TAH-UL		LV three-phase general purpose transformers UL-CSA marked up to 25 kVA and industrial control transformers UL-CSA up to 80 kVA	pag.	8
T3TAH-UL		LV three-phase general purpose transformers UL-CSA marked industrial control transformers UL-CSA up to 800 kVA	pag.	10
T3TAH-UL WITH APPROVED METAL BOX		LV three-phase general purpose transformers UL-CSA marked industrial control transformers UL-CSA from 3kVA up to 500 kVA - IP44	pag.	12
AT3TH-UL WITH APPROVED METAL BOX		LV three-phase industrial control auto-transformers UL-CSA up to 630 kVA	pag.	14
T3T	CE	LV three-phase isolating and safety transformers up to 40 kVA	pag.	16
T3T	CE	LV three-phase dry-type power transformers up to 2000 kVA	pag.	18
T3X	CE	LV three-phase dry-type power transformers with protection degree IP55	pag.	20
T3SL	CE	LOW-LOSSES three-phase SLIM-LINE transformers ECO DESIGN	pag.	21
T3T-MV		Distribution Transformers MV-LV dry-type ecodesign standard	pag.	22
		Three-phase auto-transformers and reactors motors starting	pag	24

38.02 /// REACTORS

R3F	CE	Three-phase filter reactors	pag.	26
R3L	CE	Three-phase smoothing reactors	pag.	27

38.03 /// STEEL ENCLOSURE

IP23-IP44-IP55		Steel enclosure for three-phase transformers	pag.	28
-----------------------	--	--	------	----

38.04 /// SINGLE-PHASE TRANSFORMERS

T1Q-T1ULF-T1AUL		LV single-phase isolating and safety transformers ENEC and UL-CSA marked	pag.	30
T1B	 CE	LV single-phase isolating and safety transformers input/output in 2 sides – class F	pag.	33
T1C	CE	LV single-phase isolating and safety transformers input/output in 1 side – class F	pag.	34
T1-IT	CE	LV single-phase isolating and safety transformers – class B	pag.	35
T1P	CE	LV single-phase isolating and safety transformers with resettable switch	pag.	36
T1U	 CE 	LV single-phase univesal input low-voltage isolating and safety transformers	pag.	37
T1L	CE 	LV single-phase isolating and safety transformers for screw or DIN bar installation IP20	pag.	38
T2	CE 	LV single-phase dry-type transformers from 5 to 80 kVA	pag.	39
T2H	CE	LV single-phase transformers for medical locations	pag.	40
T5-T6-T7	 	PCB transformers	pag.	41
		Other transformers	pag.	43

38.05 /// TECHNICAL NOTES

Technical Notes	pag.	48
-----------------	------	----

38.01 /// THREE-PHASE TRANSFORMERS





up to 25 KVA



up to 80 KVA



General data

Rated input voltage	100-600 V
Rated output voltage	10-600 V
Rated power	from 100 to 80kVA
Insulation class	class H
Temperature class	class F

Ambient temperature	Ta=40°C
Protection degree	IP 00
Test voltage	4,2 KV/1'
Terminals	terminal blocks or bars

Application:

Three-phase transformers UL-CSA marked suitable for any industrial application.

In particular:

- up to 5kVA: UL-CSA Listed marked
 - from 5kVA to 25kVA: UL-CSA – Recognized component marked
- Construction in accordance with the following standards

Standard

UL 5085 1 and 2 – Low voltage transformers

CSA 22.2 No 66

Certifications

	(Listed) FILE E169331 vol. 2-sec. 1-2 industrial control transformers
	(Recognized) File E169331 vol.1 sec. 2
	Insulation System : File 215141 vol.1



Technical data T3TULF - T3TAH-UL

CODE	RATED POWER	APPROVALS	INSULATION CLASS	DIMENSIONS (mm)					WEIGHT	FIG.
	KVA			A	B	C	D	E		
T3TULF-0,1...	0,1		F	120	75	110	100	50	2,1	1
T3TULF-0,16...	0,16		F	120	85	110	100	60	2,8	1
T3TULF-0,25...	0,25		F	151	95	150	125	60	3,8	1
T3TULF-0,4...	0,4		F	151	110	150	125	75	5,5	1
T3TULF-0,5...	0,5		F	180	120	190	150	72	6,7	1
T3TULF-0,75...	0,75		F	180	140	190	150	92	10,9	1
T3TULF-1...	1		F	240	145	260	200	80	15	1
T3TULF-1,5...	1,5		F	240	155	260	200	90	17,6	1
T3TULF-2...	2		F	240	170	260	200	100	24,8	1
T3TULF-2,5...	2,5		F	240	185	260	200	115	28,1	1
T3TULF-3...	3		F	300	160	315	250	91	33	1
T3TULF-4...	4		F	300	170	315	250	101	39	1
T3TULF-5...	5		F	300	190	315	250	121	49	1
T3TAHUL-7,5...	7,5		H	360	200	356	325	150	62	1
T3TAHUL-10...	10		H	360	230	356	325	180	80	1
T3TAHUL-15...	15		H	420	250	415	375	170	91	1
T3TAHUL-20...	20		H	420	270	415	375	200	135	1
T3TAHUL-25...	25		H	480	300	445	425	190	145	1
T3TAHUL-30...	30		H	480	320	445	425	210	155	1
T3TAHUL-35...	35		H	480	340	445	425	230	180	1
T3TAHUL-40...	40		H	480	350	445	425	240	190	1-2
T3TAHUL-45...	45		H	600	350	600	540	220	200	1-2
T3TAHUL-50...	50		H	600	360	600	540	230	220	1-2
T3TAHUL-60...	60		H	600	380	600	540	250	250	1-2
T3TAHUL-70...	70		H	600	390	600	540	260	270	1-2
T3TAHUL-80...	80		H	600	410	600	540	280	305	1-2

Electrical data

	RATED POWER		LOSSES (W)		EFFICIENCY	UCC	INRUSH CURRENT
	KVA	no-load	load (75°C)	total			
T3TULF	0,1	5	15	20	83	13,5	24
	0,16	6,5	19,5	26	85,8	10,9	25
	0,25	7,5	24	31,5	88,4	9	26
	0,4	11,5	38	49,5	88,6	8,8	28
	0,5	15	26,5	41,5	92,2	5,1	28
	0,75	22,5	30	52,5	93,3	3,9	29
	1	25,8	42	67,8	93,6	4	20
	1,5	30	64,5	94,5	93,9	4,2	18
	2	37,5	102	139,5	93,4	4,8	18
	2,5	46	114	160	93,9	4,4	16
	3	47	129	176	94,3	4,2	16
	4	58	186	244	94,2	4,5	16
	5	76	169	245	95,3	3,4	18
T3TAH-UL	7,5	115	330	445	94,4	4,6	17
	10	125	350	475	95,4	4,2	17
	15	125	540	665	95,7	4,2	18
	20	205	500	705	96,6	3,7	18
	25	190	710	900	96,5	3,5	18
	30	210	760	970	96,8	3,4	17
	35	235	860	1095	96,9	3,2	17
	40	250	970	1220	97	3,2	17
	45	250	1430	1680	96,5	4,8	10
	50	270	1480	1750	96,6	5,5	9
	60	320	1565	1885	97	4,7	9
	70	340	1830	2170	97	4,9	9
	80	390	1950	2340	97,2	4,6	9

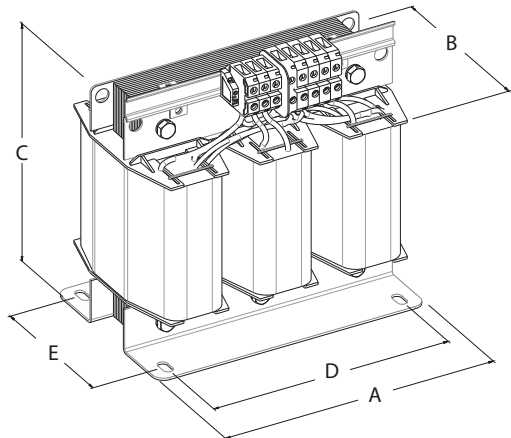


Fig.1 T3TULF - Up to 5 KVA

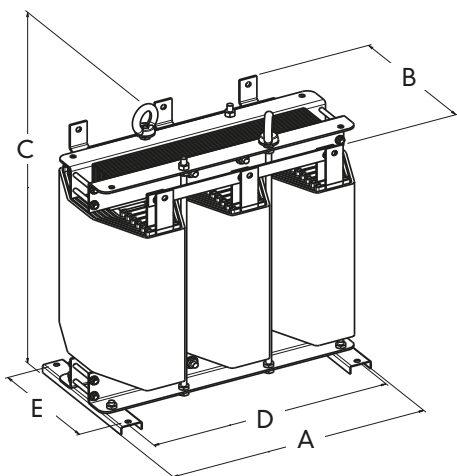


Fig. 2 T3TAH-UL - 5-80 KVA

NEW



up to 800 kVA



General data

Rated input voltage	208-690 V
Rated output voltage	208-690 V
Rated power	from 80 kVA to 800 kVA
Insulation class	class H
Temperature class	class H

Ambient temperature	Ta=40°C
Protection degree	IP 00
Test voltage	4,2 KV/1'
Terminals	terminal blocks or bars

Application:

Three-phase transformers UL-CSA marked suitable for any industrial application.

Certifications

	(Recognized) File E169331 vol.1 sec. 2
	Insulation System : File 215141 vol.1

Standard

UL 5085 1 and 2 – Low voltage transformers
CSA 22.2 No 66



Technical data T3TAH-UL

CODE	RATED POWER	APPROVALS	INSULATION CLASS	DIMENSIONS (mm)			WEIGHT	FIG.
	kVA			A	B	C	Kg	
T3TAHUL-100...	100		H	720	500	690	440	1
T3TAHUL-125...	125		H	720	530	690	540	1
T3TAHUL-160...	160		H	720	580	690	660	1
T3TAHUL-200...	200		H	720	600	690	710	1
T3TAHUL-250...	250		H	840	600	800	960	1
T3TAHUL-315...	315		H	840	670	800	1210	1
T3TAHUL-400...	400		H	1080	680	950	1290	1
T3TAHUL-500...	500		H	1080	740	950	1540	1
T3TAHUL-630...	630		H	1080	710	1050	1640	1
T3TAHUL-800...	800		H	1080	760	1050	1790	1



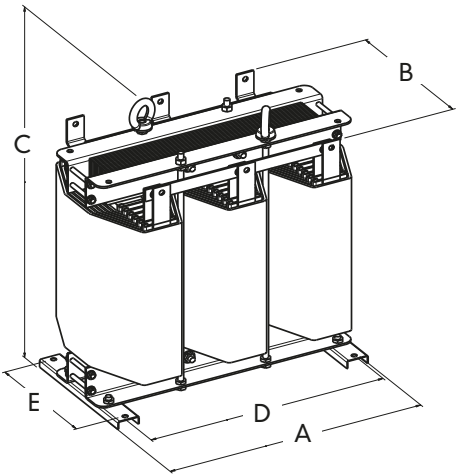


Fig. 1 T3TAH-UL - 100 kVA - 800 kVA

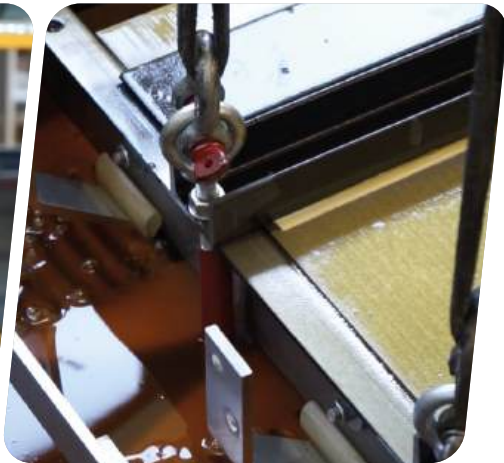


NEW

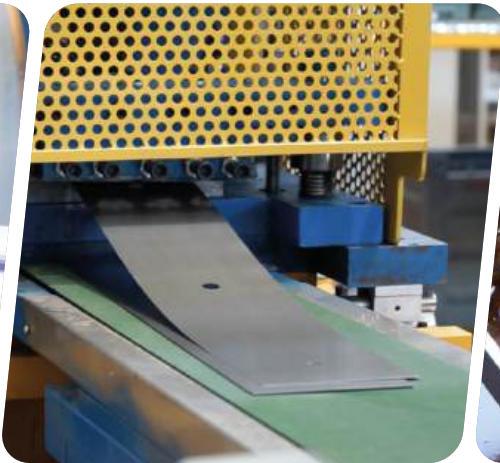

up to 25 kVA



up to 500 kVA

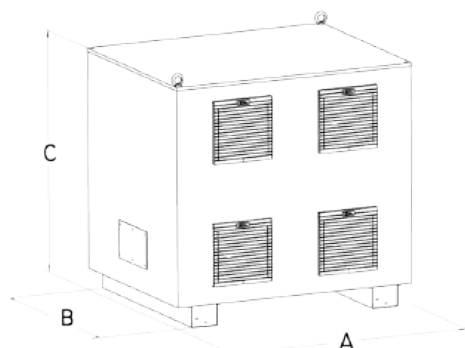

Technical data IP44

CODE	DIMENSIONS (mm)			WEIGHT Kg
	A	B	C	
BOX44-1	610	460	720	35
BOX44-2	810	560	920	56
BOX44-3	1000	800	1000	76
BOX44-4	1300	1000	1400	166
BOX44-5	1600	1300	1500	204

Technical details:

- pre-galvanized steel painted with polyester resin for external
- eye bolts for lifting
- enclosure color: RAL7035



Technical data T3TAH-UL WITH METAL BOX

CODE	RATED POWER	APPROVALS	INSULATION CLASS	DIMENSIONS (mm)					WEIGHT	BOX
	kVA			A	B	C	D	E	Kg	
T3TAHUL-3...	3		H	300	160	315	250	91	33	1
T3TAHUL-4...	4		H	300	170	315	250	101	39	1
T3TAHUL-5...	5		H	300	190	315	250	121	49	1
T3TAHUL-7,5...	7,5		H	360	200	356	325	150	62	1
T3TAHUL-10...	10		H	360	230	356	325	180	80	2
T3TAHUL-15...	15		H	420	250	415	375	170	91	2
T3TAHUL-20...	20		H	420	270	415	375	200	135	2
T3TAHUL-25...	25		H	480	300	445	425	190	145	2
T3TAHUL-30...	30		H	480	320	445	425	210	155	2
T3TAHUL-35...	35		H	480	340	445	425	230	180	2
T3TAHUL-40...	40		H	480	350	445	425	240	190	2
T3TAHUL-45...	45		H	600	350	600	540	220	200	3
T3TAHUL-50...	50		H	600	360	600	540	230	220	3
T3TAHUL-60...	60		H	600	380	600	540	250	250	3
T3TAHUL-70...	70		H	600	390	600	540	260	270	3
T3TAHUL-80...	80		H	600	410	600	540	280	305	3
T3TAHUL-100...	100		H	720	500	690	-	-	440	3
T3TAHUL-125...	125		H	720	530	690	-	-	540	4
T3TAHUL-160...	160		H	720	580	690	-	-	660	4
T3TAHUL-200...	200		H	720	600	690	-	-	710	4
T3TAHUL-250...	250		H	840	600	800	-	-	960	4
T3TAHUL-315...	315		H	840	670	800	-	-	1210	5
T3TAHUL-400...	400		H	1080	680	950	-	-	1290	5
T3TAHUL-500...	500		H	1080	740	950	-	-	1540	5


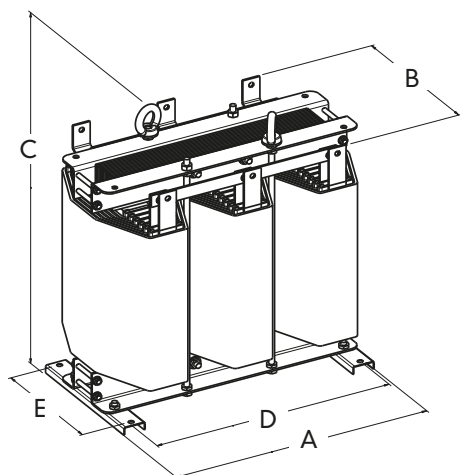


Fig. 2 T3TAH-UL - 3 kVA - 500 kVA

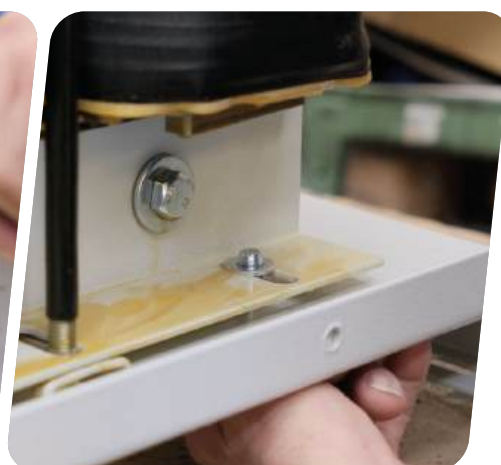

NEW




Fig. 1




Fig. 2



General data

Three-phase auto-transformers are electrical machine with one single common wiring where primary and secondary are not galvanically separated. They have smaller construction compared to the same isolating transformers. Typical applications are speed control for Fans, Starting of big three-phase Electric Motors, etc... Auto-transformers do not protect from earth failure. Their special feature is that the nearer are the values of the input and output voltage, the more cost-effective are auto-transformers. It is clear that auto-transformers should be calculated and designed every time, based on customer requests, since the input and output voltages are critical to determine the correct electrical sizing.

Construction in accordance with the following standards:

Standard

CEI-EN 61558; p. 2-13

UL5085 1-2 up to 630.000 VA

Certifications



File E169331 vol.1 sec. 2

The design rating power could be calculated by the following formula:

$$\text{Design rating} = P_{nom} \left(1 - \frac{V_1}{V_2} \right)$$

where:

P_{nom} = rated power (VA)

V_1 = lower voltage (V)

V_2 = higher voltage(V)

Example:


P_{nom} = 100 kVA

V_1 = 380 V

V_2 = 480 V

$$\text{Design rating} = 100 \times \left(1 - \frac{380}{480} \right) = 21 \text{ kVA}$$

In this case technical data are referred to AT3TH-UL-20kVA

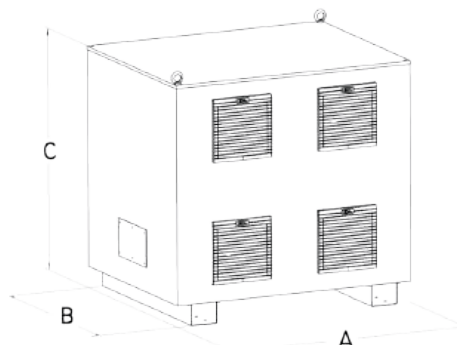


Technical data IP44

CODE	DIMENSIONS (mm)			WEIGHT Kg
	A	B	C	
BOX44-1	610	460	720	35
BOX44-2	810	560	920	56
BOX44-3	1000	800	1000	76
BOX44-4	1300	1000	1400	166
BOX44-5	1600	1300	1500	204

Technical details:

- pre-galvanized steel painted with polyester resin for external
- eye bolts for lifting
- enclosure color: RAL7035



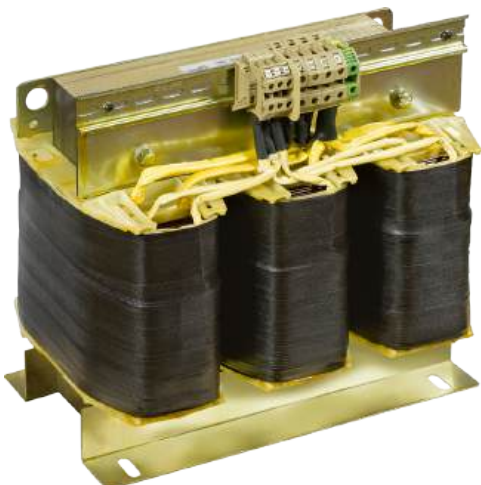

T3T up to 10 KVA



T3T 11-40 KVA



General data

Rated input voltage	100-600 V
Rated output voltage	24-600 V
Rated power	up to 25 k VA (safety transformers) up to 40 kVA (isolating transformers)
Insulation class	class F / H
Temperature class	class F / H

Ambient temperature	Ta=40°C
Protection degree	IP 00
Standard vector group	Dyn11 (others upon request)
Test voltage	4,2 KV/1'
Terminals	terminal blocks or bars

Application:

Three-phase transformers suitable for any industrial application where it is required the separation between the load and the net. Construction in accordance with the following standards:

Standard

CEI-EN 61558; p. 2-4 – Isolating transformers
CEI-EN 61558; p. 2-6 – Safety transformers
IEC 61558; 2-4; 2-6

Upon request:

The transformers could be customized with:

- different voltages
- regulations
- taps on primary or secondary
- different enclosures
- wheels for movement
- vibration absorbers
- electrostatic screen between primary and secondary
- temperature control unit with 3PT100 probes inserted



STEEL ENCLOSURE for three-phase transformers pag. 40

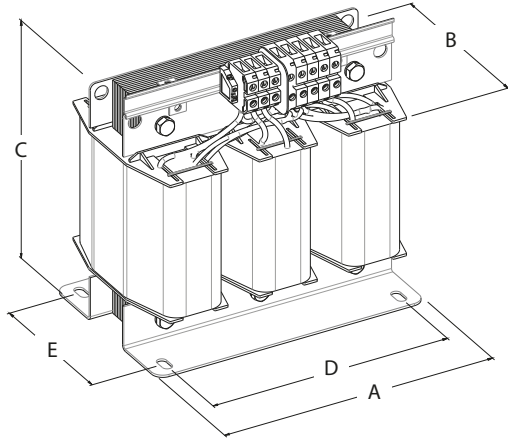


Fig. 1

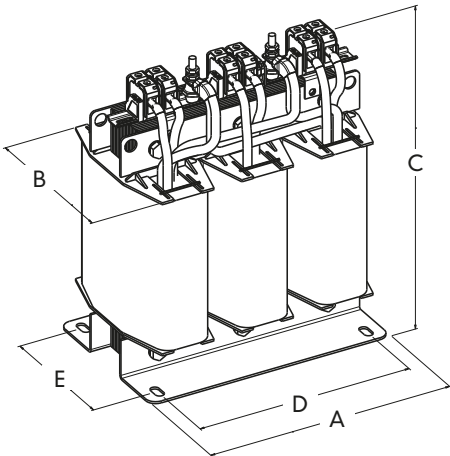


Fig. 2

Technical data T3T

CODE	RATED POWER KVA	INSULATION CLASS	DIMENSIONS (mm)					WEIGHT Kg	FIG.	BOX
			A	B	C	D	E			
T3T-0,1...	0,1	F	120	75	110	100	50	2,1	1	-
T3T-0,16...	0,16	F	120	85	110	100	60	2,8	1	-
T3T-0,25...	0,25	F	151	95	150	125	60	3,8	1	-
T3T-0,4...	0,4	F	151	110	150	125	75	5,5	1	-
T3T-0,5...	0,5	F	180	120	190	150	72	6,7	1	-
T3T-0,75...	0,75	F	180	140	190	150	92	10,9	1	-
T3T-1...	1	F	240	145	260	200	80	15	1	-
T3T-1,5...	1,5	F	240	155	260	200	90	17,6	1	-
T3T-2...	2	F	240	170	260	200	100	24,8	1	-
T3T-2,5...	2,5	F	240	185	260	200	115	28,1	1	-
T3T-3...	3	F	300	160	315	250	91	33	1	...-1
T3T-4...	4	F	300	170	315	250	101	39	1	...-1
T3T-5...	5	F	300	190	315	250	121	49	1	...-1
T3T-6...	6	F	360	170	365	300	106	58	1	...-2
T3T-7...	7	F	360	180	365	300	116	62	1	...-2
T3T-8...	8	F	360	190	365	300	126	66	1	...-2
T3T-9...	9	F	360	200	365	300	136	69	1	...-2
T3T-10...	10	F	360	210	365	300	146	75	1	...-2
T3T-15...	15	F	420	250	420	375	150	89	2	...-3
T3T-20...	20	F	420	270	420	375	172	110	2	...-3
T3T-25...	25	F	480	270	450	440	180	125	2	...-4
T3T-30...	30	F	480	280	450	440	190	145	2	...-4
T3T-40...	40	F	480	315	450	440	220	178	2	...-4

Electrical data

RATED POWER KVA	LOSSES (W)			EFFICIENCY %	Ucc %			INRUSH CURRENT x In
	no-load	load (75°C)	total		Ucc X	Ucc R	Ucc tot	
0,1	5	15	20	83	-	-	13,5	24
0,16	6,5	19,5	26	85,8	-	-	10,9	25
0,25	7,5	24	31,5	88,4	-	-	9	26
0,4	11,5	38	49,5	88,6	-	-	8,8	24
0,5	15	26,5	41,5	92,2	-	-	5,1	22
0,75	22,5	30	52,5	93,3	-	-	3,9	25
1	25,8	42	67,8	93,6	-	-	4	20
1,5	30	64,5	94,5	93,9	-	-	4,2	18
2	37,5	102	139,5	93,4	-	-	4,8	17
2,5	46	114	160	93,9	-	-	4,4	15
3	47	129	176	94,3	-	-	4,2	15
4	58	186	244	94,2	-	-	4,5	15
5	76	169	245	95,3	-	-	3,4	16
6	84	300	384	94	-	-	5,2	14
7	100	285	385	94,7	-	-	4,4	15
8	110	355	465	94,5	-	-	4,5	15
9	122	384	506	94,7	-	-	4,3	15
10	135	387	522	95,06	1,46	4,3	4,55	16
15	192	440	632	96,22	1,7	3,17	3,6	16
20	140	570	710	96,78	1,68	2,6	3,1	16
25	160	720	880	96,6	2,77	2,88	4	18
30	190	800	990	96,81	2,18	2,67	3,45	17
40	235	950	1185	97,12	1,98	2,38	3,1	15



T3T up to 80 kVA



T3T 81-2000 kVA



General data

Rated input voltage	up to 1000 V
Rated output voltage	up to 1000 V
Rated power	41 to 2000 kVA
Insulation class	class F / H
Temperature class	class F / H

Ambient temperature	Ta=40°C
Protection degree	IP 00
Standard vector group	Dyn11 (others upon request)
Test voltage	3 KV/1'
Terminals	terminal blocks or bars

Application:

Three-phase transformers suitable for any industrial application where it is required the isolation or voltage variation between the load and the net. Construction in accordance with the following standards:

Standard

CEI-EN 60076

IEC 60076

Upon request:

The transformers could be customized with:

- different voltages
- regulations
- taps on primary or secondary
- different enclosures
- wheels for movement
- vibration absorbers
- electrostatic screen between primary and secondary
- temperature control unit with 3PT100 probes inserted



STEEL ENCLOSURE for three-phase transformers pag. 40



Technical data T3T

CODE	RATED POWER	INSULATION CLASS	DIMENSIONS (mm)					WEIGHT	FIG	BOX
	kVA		A	B	C	D	E	Kg		
T3T-50...	50	F - H	600	350	600	540	250	220	1	...-5
T3T-60...	60	F - H	600	360	600	540	260	230	1	...-5
T3T-80...	80	F - H	600	390	600	540	290	280	1	...-5
T3T-100...	100	F - H	600	420	600	540	320	330	2	...-5
T3T-125...	125	F - H	720	420	740	660	300	390	2	...-6
T3T-160...	160	F - H	720	460	740	660	340	510	2	...-6
T3T-200...	200	F - H	720	480	740	660	360	570	2	...-6
T3T-250	250	F - H	720	510	740	660	380	660	2	...-6
T3T-315	315	F - H	720	550	740	660	430	780	2	...-6
T3T-400	400	F - H	960	630	920	-	-	1090	2	...-7
T3T-500	500	F - H	960	680	920	-	-	1335	2	...-7
T3T-630	630	F - H	960	730	920	-	-	1575	2	...-7
T3T-800...	800	F - H	1080	650	1190	-	-	1670	2	...-8
T3T-1000...	1000	F - H	1080	700	1190	-	-	2020	2	...-8
T3T-1250...	1250	F - H	1080	800	1190	-	-	2400	2	...-8
T3T-1600...	1600	F - H	1200	800	1250	-	-	2850	2	...-8
T3T-2000...	2000	F - H	1200	800	1380	-	-	3300	2	...-8

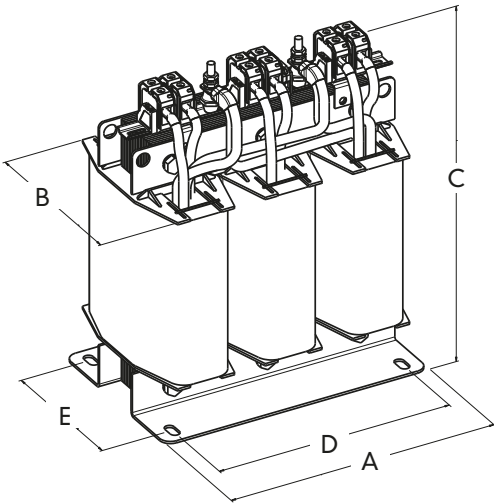


Fig. 1

Electrical data

RATED POWER	LOSSES (W)			EFFICIENCY	Ucc %			INRUSH CURRENT
	KVA	no-load	load (75°C)		Ucc X	Ucc R	Ucc tot	
50	245	1300	1545	97	4,32	2,6	5,05	18
60	265	1600	1865	96,99	4,4	2,67	5,15	15
80	340	1900	2240	97,28	4,39	2,38	5	15
100	430	2200	2630	97,44	3,75	2,2	4,35	16
125	400	2400	2800	97,81	4,23	1,92	4,65	14
160	520	2800	3320	97,97	3,03	1,75	3,5	14
200	560	3100	3660	98,2	3,46	1,55	3,8	14
250	670	3500	4170	98,36	3,47	1,4	3,75	13
315	840	4000	4840	98,49	3,52	1,27	3,75	14
400	1120	5060	6180	98,5	6,37	1,27	6,5	15
500	1340	5565	6905	98,6	5,34	1,12	5,5	15
630	1650	6780	8430	98,7	4,86	1,08	5	16
800	1760	9150	10910	98,8	5,56	1,15	5,7	8
1000	2100	9250	11350	98,9	4,79	0,93	4,9	8

For higher powers technical and electrical data, please contact METH


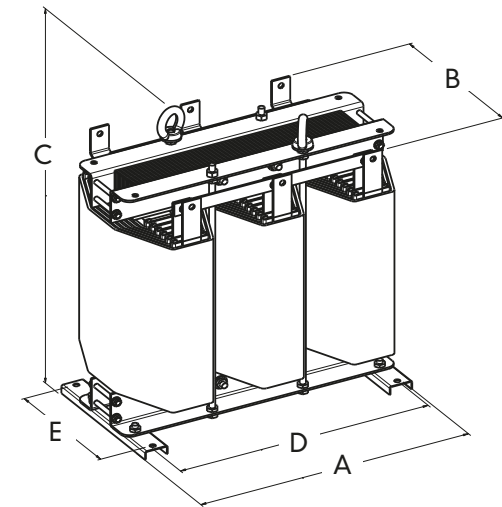


Fig. 2

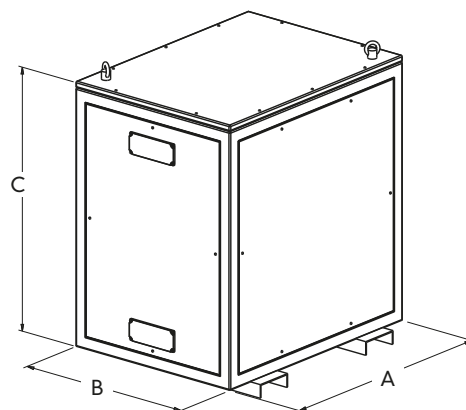

General data

Rated input voltage	up to 1000 V	Ambient temperature	Ta=40°C
Rated output voltage	up to 1000 V	Protection degree	with enclosure IP55
Rated power	10 to 300 kVA	Standard vector group	Dyn11 (others upon request)
Insulation class	class F-H	Test voltage	3 KV/1'
Temperature class	class F	Terminals	terminal blocks or bars

Application:

Three-phase transformers suitable for any industrial application where the protection degree IP55 is required. The enclosure is pre-galvanized steel painted with polyester resin for external without fan ventilation. Construction in accordance with the following standards:

Standard

CEI-EN 60076



IEC 60076

For higher power please contact METH

Technical data T3X

Electrical data

CODE	RATED POWER	INSULATION CLASS	DIMENSIONS (mm)			WEIGHT	LOSSES (W)			EFFICIENCY	Ucc X	Ucc R	Ucc tot	INRUSH CURRENT
			A	B	C		no-load	load (75°C)	total					
	kVA					Kg				%	%	%	%	x In
T3X-10...	10	F	750	650	850	200	150	200	350	96,6	1,67	2	2,6	21
T3X-15...	15	F	850	700	850	220	170	280	450	97	1,16	1,87	2,2	19
T3X-20...	20	F	850	700	950	240	190	350	540	97,3	1,65	1,75	2,4	20
T3X-25...	25	F	850	700	950	270	250	410	660	97,4	1,32	1,64	2,1	17
T3X-30...	30	F	850	700	950	290	280	460	740	97,5	1,28	1,54	2	18
T3X-40...	40	F	1000	850	1100	320	300	650	950	97,6	2,99	1,63	3,4	15
T3X-50...	50	F	1000	850	1100	345	350	850	1200	97,6	2,72	1,7	3,2	14
T3X-60...	60	F	1000	850	1100	380	420	1000	1420	97,6	2,25	1,67	2,8	14
T3X-80...	80	F	1000	850	1100	460	500	1250	1750	97,8	2,2	1,57	2,7	13
T3X-100...	100	F	1200	1000	1300	610	550	1300	1850	98,1	2,14	1,3	2,5	11
T3X-125...	125	F	1200	1000	1300	680	600	1500	2100	98,3	2,08	1,2	2,4	10
T3X-160...	160	F	1200	1000	1300	770	700	1800	2500	98,4	2,24	1,13	2,5	10
T3X-200...	200	F	1200	1000	1360	990	900	2000	2900	98,5	2,19	1	2,4	9
T3X-300...	300	F	1600	1200	1550	1250	1000	2530	3530	98,8	4,14	0,85	4,2	9

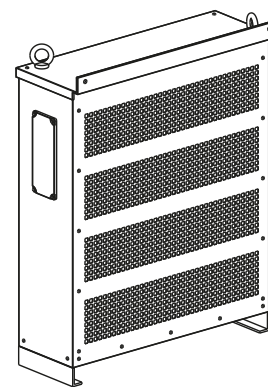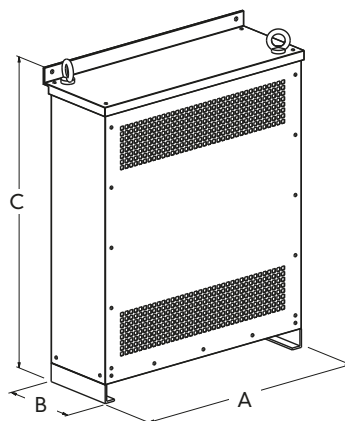

ECO-DESIGN

General data

Standard input voltage	230 V
Standard output voltage	400 V
Rated power	from 6,3 to 30 KVA
Insulation class	class F-H
Temperature class	class B
Standard ambient temperature	Ta=40°C

Protection degree	IP20
Standard vector group	YNd11 (others upon request)
Inrush current	≤10 x I _n
Test voltage	4,2 KV/1'
Terminals	terminal blocks

Application:

Three-phase transformers designed for maximum utilization of the transformer design. They have very low losses and inrush current, high efficiency and very compact construction in order to save space and reduce energy consumption. Construction in accordance with the following standards:



Standard

EN 61558, p.2-4 and directive 2009/125/EC

Technical data T3SL



Electrical data

CODE	RATED POWER KVA	DIMENSIONS (mm)			WEIGHT Kg	LOSSES (W)		I sec A	EFFICIENCY %	Ucc X %	Ucc R %	Ucc tot %	INRUSH CURRENT x I _n
		A	B	C		no-load	load (75°C)						
T3SL-6,3...	6,3	640	220	800	117	38	132	9,1	97,3	0,82	2,1	2,26	13
T3SL-10...	10	640	220	800	134	45	212	14,4	97,5	1,12	2,12	2,4	11
T3SL-12,5...	12,5	640	220	800	145	50	273	18,05	97,4	1,11	2,19	2,46	10
T3SL-16...	16	640	220	800	162	58	386	23,1	97,3	1,72	2,42	2,97	9
T3SL-20...	20	790	240	1050	177	64	477	28,9	97,3	1,71	2,39	2,94	8



Cast Resin Transformers Data
24 kV

Fig. 1



Cast Resin Transformers Data
36 kV

Fig. 2

Standard Solution

Distribution Transformers:

Rated power	100 – 3150 kVA
Primary rated voltage	up to 36 kV
Secondary rated voltage	3 KV/1'
Terminals	up to 433V

Material of windings

Aluminium (Al)

Equipment

Distribution Transformers:

HV terminals (n°3 pieces)
LV bar terminals (n°4 pieces)
Off load tapping links (n°3 pieces)
Rating plate (n°1 pieces)
Lifting lugs (n°4 pieces)
Earth terminals (n°2 pieces)
Orientable rollers (n°4 pieces)

Accessories (on request)

- Pt100 thermosensors with connection box
- PTC thermistors (as an alternative to the Pt100 thermosensors)
- Electronic unit for thermal control, with inputs for Pt100 and temperature display
- Electronic unit for thermal control, with inputs for PTC, without temperature display
- Forced ventilation systems (for temporary power increase)
- Electronic unit for ventilation system
- Transformer protective enclosure (degree protection IP23 & IP31)
- Surge arresters kit
- Antivibration pads
- HV terminals for plugin connections (Elastimold)
- Antiseismic frame (in base of level of earthquake)
- OLTC (OnLoad TapChangers)
- CT and VT instrument transformer

IEC 600761

GENERAL STANDARD OF POWER TRANSFORMERS

Specific Standards related to transformers

- IEC 60076-1 : Power transformers - Part 1: General;
- IEC 60076-3 : Power transformers - Part 3: Insulation levels, dielectric tests and external clearances in air;
- IEC 60076-5 : Power transformers - Part 5: Ability to withstand short circuit;
- IEC 60076-6 : Power transformers - Part 6: Reactors;
- IEC 60076-8 : Power transformers - Part 8: Application guide;
- IEC 60076-10-1 : Power transformers - Part 10-1: Determination of sound levels - Application guide;
- IEC 60076-11 : Power transformers - Part 11: Dry-type transformers;
- IEC 60076-12 : Power transformers - Part 12: Loading guide for dry-type power transformers ;
- IEC TS 60076-19 : Power transformers - Part 19: Rules for the determination of uncertainties in the measurement of the losses on power transformers and reactors ;
- IEC TR 60616 : Terminal and tapping markings for power transformers;
- IEC 61378-1 : Converter transformers - Part 1: Transformers for industrial applications;
- IEC 61378-3 : Converter transformers - Part 3: Application guide;
- IEC 62032 : Guide for the Application, Specification and Testing of Phase-Shifting Transformers;
- IEC 60529 : Degrees of protection provided by enclosures (IP Code);
- IEC 60068-3-3 : Environmental testing - Part 3-3: Guidance - Seismic test methods for equipments;
- EN 50588-1:2015 : Medium power transformers 50 Hz, with highest voltage for equipment not exceeding 36 kV - Part 1: General requirements;

Cast Resin Transformers Data 24 kV


Fig. 1

RATED POWER	SERIES	Po	Pcc 120°C	Vcc 75°C	Io	EFFICIENCY		VOLTAGE DROP		LpA	LwA	A	B	C	P	Q	R	S	T	WEIGHT
						cosφ 1 LOAD 100%	cosφ 1 LOAD 75%	cosφ 1 LOAD 100%	cosφ 1 LOAD 100%											
kVA		W	W	%	%	%	%	%	%	dB	dB	mm	mm	mm	mm	mm	mm	mm	mm	kg
100	Standard	480	1955	6	2,3	97,62	97,94	2,13	4,48	48	61	1200	760	1240	520	620	125	40	35	580
	EcodeSIGN	252	1800	6	2,3	97,72	98,12	2,23	4,56	39	51	1130	750	1250	520	620	125	40	35	650
160	Standard	650	2850	6	2,0	97,86	98,16	1,96	4,33	51	64	1240	750	1250	520	620	125	40	35	800
	EcodeSIGN	360	2600	6	2,0	97,98	98,34	1,99	4,35	42	54	1270	770	1250	520	620	125	40	35	850
250	Standard	880	3900	6	1,8	98,16	98,42	1,70	4,10	54	67	1290	775	1410	520	620	125	40	35	1050
	EcodeSIGN	468	3400	6	1,8	98,30	98,60	1,70	4,10	45	57	1270	790	1420	520	620	125	40	35	1150
315	Standard	1030	4600	6	1,7	98,24	98,49	1,64	4,04	56	70	1290	770	1525	520	620	125	40	35	1200
	EcodeSIGN	557	3875	6	1,7	98,43	98,70	1,58	3,99	46	59	1340	790	1530	520	620	125	40	35	1300
400	Standard	1200	5500	6	1,5	98,35	98,59	1,55	3,97	57	71	1320	845	1565	520	770	125	40	35	1300
	EcodeSIGN	675	4500	6	1,5	98,46	98,73	1,55	3,97	47	60	1340	860	1630	670	770	125	40	35	1450
500	Standard	1400	6780	6	1,4	98,39	98,63	1,54	3,95	57	71	1430	850	1620	670	770	125	40	35	1550
	EcodeSIGN	811	5630	6	1,4	98,56	98,81	1,46	3,88	48	61	1400	880	1640	670	770	125	40	35	1650
630	Standard	1650	7800	6	1,3	98,52	98,74	1,42	3,85	58	72	1430	885	1760	670	770	125	40	35	1800
	EcodeSIGN	990	7100	6	1,3	98,64	98,88	1,39	3,82	49	62	1400	880	1760	670	770	125	40	35	1850
800	Standard	2000	9200	6	1,1	98,62	98,82	1,33	3,77	59	73	1500	890	1810	670	770	125	40	35	2150
	EcodeSIGN	1170	8000	6	1,1	98,85	99,04	1,18	3,64	50	64	1490	890	1880	670	770	125	40	35	2400
1000	Standard	2300	10800	6	1,0	98,71	98,90	1,26	3,71	60	74	1500	1000	1960	820	1000	125	40	35	2500
	EcodeSIGN	1395	9000	6	1,0	98,96	99,13	1,08	3,55	51	65	1630	1020	1950	820	1000	125	40	35	3050
1250	Standard	2700	13100	6	0,9	98,75	98,94	1,23	3,68	62	76	1600	1000	1975	820	1000	125	40	35	2850
	EcodeSIGN	1620	11000	6	0,9	98,99	99,16	1,06	3,53	53	67	1670	1040	2080	820	1000	125	40	35	3500
1600	Standard	3100	15800	6	0,9	98,83	99,01	1,17	3,63	62	76	1680	1025	2265	820	1000	200	70	50	3450
	EcodeSIGN	1980	13000	6	0,9	99,06	99,21	0,99	3,47	54	68	1700	1040	2380	820	1000	200	70	50	4150
2000	Standard	4000	18000	6	0,8	98,91	99,07	1,08	3,55	63	78	1830	1140	2420	1070	1200	200	70	50	4250
	EcodeSIGN	2340	16000	6	0,8	99,08	99,23	0,98	3,46	55	70	1840	1200	2420	1070	1200	200	70	50	4850
2500	Standard	5000	21850	6	0,7	98,94	99,09	1,05	3,53	65	80	1940	1170	2470	1070	1200	200	70	50	5000
	EcodeSIGN	2790	19000	6	0,7	99,12	99,27	0,94	3,43	56	71	1960	1200	2470	1070	1200	200	70	50	5700
3150	Standard	5600	24150	8	0,6	99,06	99,19	1,09	4,41	66	81	2160	1200	2510	1070	1200	200	70	50	6300
	EcodeSIGN	3420	22000	8	0,6	99,19	99,32	1,02	4,35	58	74	2150	1200	2530	1070	1200	200	70	50	6700

Cast Resin Transformers Data 36 kV

Fig. 2

RATED POWER	SERIES	Po	Pcc 120°C	Vcc 75°C	Io	EFFICIENCY		VOLTAGE DROP		LpA	LwA	A	B	C	P	Q	R	S	T	WEIGHT
						cosφ 1 LOAD 100%	cosφ 1 LOAD 75%	cosφ 1 LOAD 100%	cosφ 1 LOAD 100%											
kVA		W	W	%	%	%	%	%	%	dB	dB	mm	mm	mm	mm	mm	mm	mm	mm	kg
160	Standard	1000	3340	6	2	97,36	97,66	2,27	4,59	51	64	1500	800	1550	520	620	125	40	35	1120
	EcodeSIGN	414	2860	6	2	97,77	98,16	2,17	4,51	42	54	1600	850	1600	520	620	125	40	35	2900
250	Standard	1300	4600	6	1,8	97,89	97,97	2,02	4,38	54	67	1550	850	1600	520	620	125	40	35	1350
	EcodeSIGN	538	3740	6	1,8	98,12	98,45	1,85	4,23	45	57	1625	900	1750	520	620	125	40	35	3050
315	Standard	1500	5290	6	1,7	97,89	98,14	1,86	4,24	56	70	1600	850	1700	520	620	125	40	35	1600
	EcodeSIGN	641	4264	6	1,7	98,26	98,56	1,72	4,11	46	59	1650	900	1850	520	620	125	40	35	3150
400	Standard	1650	5750	6	1,5	98,18	98,40	1,62	4,02	57	71	1650	900	1820	670	770	125	40	35	1900
	EcodeSIGN	776	4950	6	1,5	98,30	98,60	1,69	4,09	47	60	1700	950	1950	670	770	125	40	35	3300
500	Standard	1950	6900	6	1,4	98,26	98,47	1,56	3,97	57	71	1700	900	1850	670	770	125	40	35	2100
	EcodeSIGN	933	6193	6	1,4	98,41	98,68	1,59	4,00	48	61	1725	975	2100	670	770	125	40	35	3450
630	Standard	2200	8050	6	1,3	98,40	98,60	1,46	3,88	58	72	1730	950	2000	670	770	125	40	35	2450
	EcodeSIGN	1138	7810	6	1,3	98,49	98,75	1,51	3,93	49	62	1750	1000	2150	670	770	125	40	35	3650
800	Standard	2700	9430	6	1,1	98,51	98,68	1,36	3,80	59	73	1750	1000	2100	670	770	125	40	35	2850
	EcodeSIGN	1345	8800	6	1,1	98,73	98,94	1,28	3,73	50	64	1875	1050	2300	670	770	125	40	35	3800
1000	Standard	3300	12075	7	1	98,49	98,67	1,45	4,30	60	74	1800	1100	2350	820	1000	125	40	35	3200
	EcodeSIGN	1604	9900	7	1	98,84	99,03	1,23	4,11	51	65	1950	1050	2450	820	1000	200	70	50	4350
1250	Standard	3700	14950	8	1	98,53	98,72	1,52	4,79	62	76	1850	1100	2400	820	1000	125	40	35	3400
	EcodeSIGN	1863	12100	8	0,9	98,88	99,06	1,29	4,59	53	67	2000	1100	2600	820	1000	200	70	50	5000
1600	Standard	4200	17250	8	0,9	98,68	98,85	1,40	4,68	62	76	2000	1100	2450	820	1000	200	70	50	4450
	EcodeSIGN	2277	14300	8	0,9	98,96	99,13	1,21	4,52	54	68	2050	1100	2650	820	1000	200	70	50	5450
2000	Standard	5000	21275	8	0,8	98,70	98,88	1,38	4,67	63	78	2150	1250	2600	1070	1200	200	70	50	5400
	EcodeSIGN	2691	17600	8	0,8	98,98	99,15	1,20	4,51	55	70	2200	1200	2650	1070	1200	200	70	50	6250
2500	Standard	5800	25300	8	0,7	98,77	98,94	1,33	4,63	65	80	2200	1250	2700	1070	1200	200	70	50	6300
	EcodeSIGN	3208	20900	8	0,7	99,03	99,19	1,16	4,47	56	71	2300	1200	2750	1070	1200	200	70	50	6500
3150	Standard	6800	27600	8	0,6	98,92	99,06	1,20	4,51	66	81	2450	1250	2700	1070	1200	200	70	50	7650
	EcodeSIGN	3933	24000	8	0,6	99,10	99,24	1,09	4,41	58	74	2350	1200	2800	1070	1200	200	70	50	7400

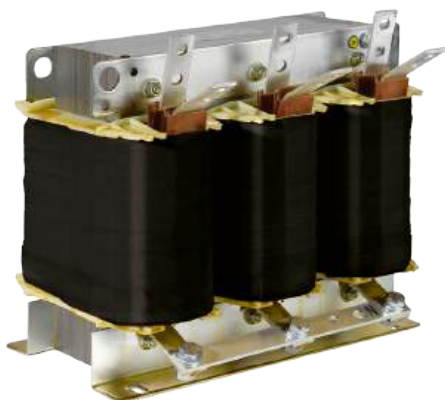

MOTOR STARTING WITH THREE-PHASE AUTO-TRANSFORMERS

Taps: 65% - 70% - 75%

$V_n = 400V$

5 startings/hour – 2 consecutive

Motor $\cos\phi = 0,85$ Power factor = 0,9

Technical data

KW	DIMENSIONS (mm)	WEIGHT Kg
20	300x120x275 (H)	28
50	360x130x330 (H)	43
75	360x150x330 (H)	56
100	360x180x330 (H)	68
200	420x210x385 (H)	112
300	480x240x440 (H)	150
400	480x270x440 (H)	185
500	600x250x550 (H)	206

MOTOR STARTING WITH THREE-PHASE REACTORS

70% V_n

$V_n = 400V$

Motor $\cos\phi = 0,85$ Power factor = 0,9



Technical data

HP	KW	DIMENSIONS (mm)	WEIGHT Kg
20	15	180x80x165 (H)	10
30	22	180x90x165 (H)	13
50	37	240x90x220 (H)	20
75	55	240x110x220 (H)	27
100	74	300x100x275 (H)	36
150	110	300x120x275 (H)	47
200	147	360x120x330 (H)	64
300	220	360x140x330 (H)	78
400	295	420x250x385 (H)	136
500	368	480x270x440 (H)	180

These devices help three-phase induction motors starting decreasing the supply voltage and the current. Once the starting is effective, the devices are switched off and the three-phase motor will work with net current.

Methi is manufacturer a wide range of single- and three-phase reactors.

MAIN APPLICATIONS OF REACTORS

R3F THREE-PHASE PFC FILTER REACTORS

The insertion of capacitors banks in presence of harmonics causes a current absorption harmful for life time of capacitors.

Reactors connected in series with the capacitors guarantee:

- Reduction of harmonics
- Reduction of current and consequent reduction of capacitor overheating
- Increase of capacitors life time

R3L/M THREE-PHASE SMOOTHING REACTORS FOR VARIABLE SPEED DRIVES (MOTOR SIDE)

Inverter Drives produce big quantity of harmful harmonics, which can damage of motor insulation and shorten its life time. Installing a choke between the drive and the motor allows to:

- Reduce the harmonics, improving waveform linearity
- Increase the life time of semiconductors
- Reduce the motor operating temperature
- Reduce the audible equipment noise
- Limit the short circuit current

R3L/R THREE-PHASE SMOOTHING REACTORS FOR VARIABLE SPEED DRIVES (GRID SIDE)

Inverter Drives not only can damage the motor.

Harmonics can penetrate into the electrical net and cause some problems to other electronic or electrical equipment.



Installing a choke between the drive and the electrical net allows to:

- Reduce the harmonics, improving waveform linearity
- Reduce interferences in the electrical net
- Increase the life time of semiconductors

REACTORS CONSTRUCTION AND MATERIALS

- Windings in copper wire class 200°C or Alluminium
- Magnetic cores from steel with reduced losses and necessary cuts.
- Double impregnation with Polyester resin for safety fixing and with oven dried varnish for protection against external agents.

- Terminals:
 - up to 20A with terminal board IP20
 - up to 90A, with lug terminals
 - over 90A with copper
- Insulation system approved by UL-CSA class F – File E215141
- EN 61558 , p.2-20
- IEC 61558
- UL 5085, p.1-2

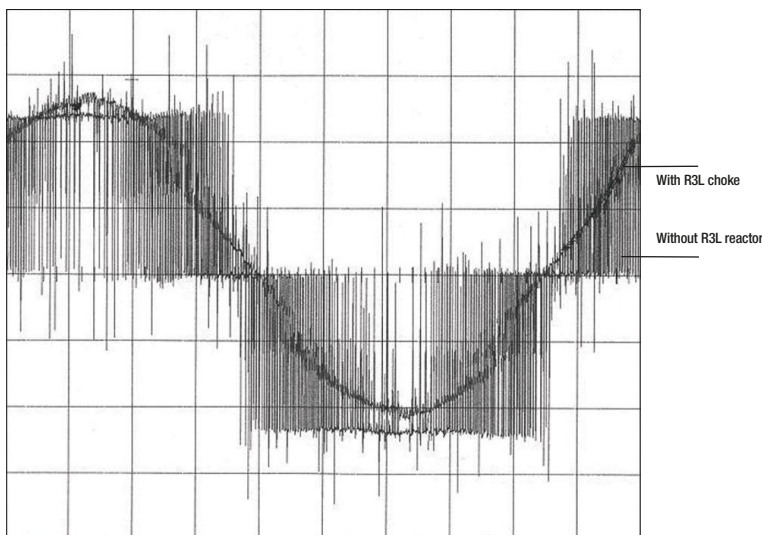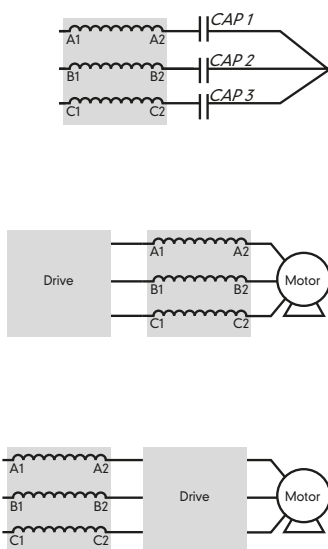

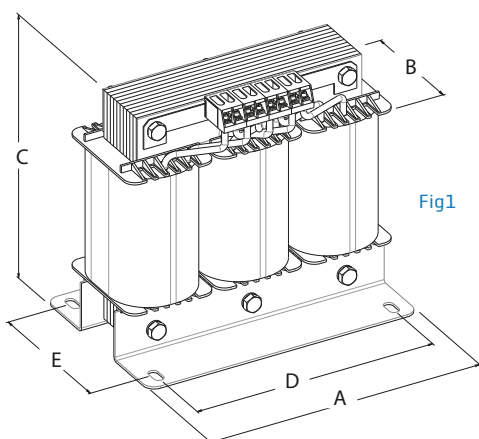


Fig 1

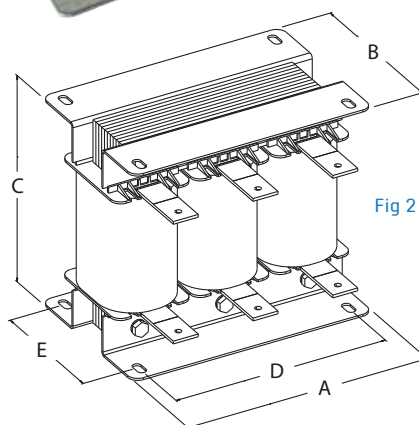


Fig 2



HARMONIC FILTER REACTOR: 400V - P=7% - 189Hz - 50Hz - LINEARITY> 1,73xI rms

Electrical data R3F-7

Technical data

CODE	RATED POWER KVAR	INDUCTANCE mH	I_L A	I rms A	LOSSES W	DIMENSIONS (mm)					WEIGHT KG	TERMINAL	CLAMP SIZE	FIG
						A	B	C	D	E				
R3F-7-400-6,25	6,25	6,13	9,56	10,2	35	150	85	140	125	65	6	SCREW	2,5 sqmm	1
R3F-7-400-10	10	3,84	15,3	16,32	50	180	102	173	150	80	8	SCREW	6 sqmm	1
R3F-7-400-12,5	12,5	3,07	19,13	20,4	56	180	113	173	150	90	9	SCREW	6 sqmm	1
R3F-7-400-20	20	1,92	30,5	33,6	67	280	150	187	225	85	13	BUSBAR	M6 FLAT	2
R3F-7-400-25	25	1,53	38,3	40,8	78	280	160	187	225	95	17	BUSBAR	M6 FLAT	2
R3F-7-400-40	40	0,96	61,3	65,4	100	280	170	205	225	105	21	BUSBAR	M8 FLAT	2
R3F-7-400-50	50	0,77	76,6	81,7	120	280	195	205	225	120	26	BUSBAR	M8 FLAT	2

HARMONIC FILTER REACTOR: 400V - P=14% - 134Hz - 50Hz - LINEARITY> 1,37xI rms

Electrical data R3F-14

Technical data

CODE	RATED POWER KVAR	INDUCTANCE mH	I_L A	I rms A	LOSSES W	DIMENSIONS (mm)					WEIGHT KG	TERMINAL	CLAMP SIZE	FIG
						A	B	C	D	E				
R3F-14-400-6,25	6,25	13,27	9,56	10,2	55	180	117	173	150	95	10	SCREW	6 sqmm	1
R3F-14-400-10	10	8,29	15,3	16,32	65	280	155	187	225	95	15	BUSBAR	M6 FLAT	2
R3F-14-400-12,5	12,5	6,63	19,13	20,4	78	280	155	187	225	95	17	BUSBAR	M6 FLAT	2
R3F-14-400-20	20	4,15	30,5	33,6	113	280	195	205	225	120	24	BUSBAR	M6 FLAT	2
R3F-14-400-25	25	3,32	38,3	40,8	117	280	200	205	225	125	27	BUSBAR	M6 FLAT	2
R3F-14-400-40	40	2,07	61,3	65,4	168	360	190	255	275	120	40	BUSBAR	M8 FLAT	2
R3F-14-400-50	50	1,66	76,6	81,7	182	360	200	255	275	130	46	BUSBAR	M8 FLAT	2

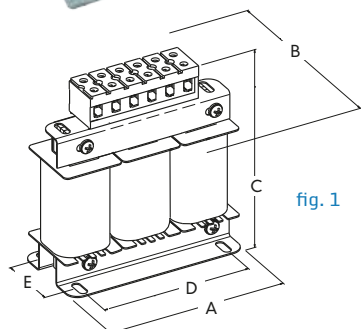


fig. 1




fig. 2




fig. 3



MOTOR SIDE ΔV 2% $I_{sat} = 1,5 I_n$ 400V 50Hz

Electrical data R3L/M

Technical data

CODE	RATED VOLTAGE	cdt	INDUCTANCE	RATED CURRENT	I_{sat}/I_n	DIMENSIONS (mm)			WEIGHT	WINDING	FIG.
	V	%	mH	A		A	B	C	Kg		
R3L/15-M	400	2	0,981	15	1,5	150	60	138	4	Cu	fig. 1
R3L/20-M	400	2	0,735	20	1,5	150	65	138	5	Cu	fig. 1
R3L/30-M	400	2	0,49	30	1,5	180	60	165	6	Cu	fig. 1
R3L/50-M	400	2	0,294	50	1,5	180	70	165	8	Al	fig. 1
R3L/75-M	400	2	0,196	75	1,5	180	80	165	10	Al	fig. 2
R3L/100-M	400	2	0,147	100	1,5	240	80	165	12	Al	fig. 2
R3L/125-M	400	2	0,118	125	1,5	240	90	220	14	Al	fig. 2
R3L/150-M	400	2	0,098	150	1,5	240	100	220	16	Al	fig. 3
R3L/200-M	400	2	0,074	200	1,5	240	110	220	19	Al	fig. 3
R3L/250-M	400	2	0,059	250	1,5	300	100	280	24	Al	fig. 3
R3L/300-M	400	2	0,049	300	1,5	300	110	280	28	Al	fig. 3
R3L/350-M	400	2	0,042	350	1,5	300	120	280	29	Al	fig. 3
R3L/400-M	400	2	0,037	400	1,5	300	130	280	34	Al	fig. 3
R3L/500-M	400	2	0,029	500	1,5	360	130	330	42	Al	fig. 3

GRID SIDE ΔV 4% $I_{sat} = 1,5 I_n$ 400V 50Hz

Electrical data R3L/R

Technical data


CODE	RATED VOLTAGE	cdt	INDUCTANCE	RATED CURRENT	I_{sat}/I_n	DIMENSIONS (mm)			WEIGHT	WINDING	FIG.
	V	%	mH	A		A	B	C	Kg		
R3L/15-R	400	4	1,961	15	1,5	180	90	155	6	Cu	fig. 1
R3L/20-R	400	4	1,471	20	1,5	180	100	155	8	Cu	fig. 1
R3L/30-R	400	4	0,981	30	1,5	180	110	155	10	Cu	fig. 1
R3L/50-R	400	4	0,588	50	1,5	240	120	210	12	Al	fig. 1
R3L/75-R	400	4	0,392	75	1,5	240	130	210	15	Al	fig. 2
R3L/100-R	400	4	0,294	100	1,5	240	140	210	18	Al	fig. 2
R3L/125-R	400	4	0,235	125	1,5	300	150	260	24	Al	fig. 2
R3L/150-R	400	4	0,196	150	1,5	300	160	260	29	Al	fig. 2
R3L/200-R	400	4	0,147	200	1,5	300	170	260	34	Al	fig. 3
R3L/250-R	400	4	0,118	250	1,5	300	180	260	40	Al	fig. 3
R3L/300-R	400	4	0,098	300	1,5	360	190	310	49	Al	fig. 3
R3L/350-R	400	4	0,084	350	1,5	360	200	310	57	Al	fig. 3
R3L/400-R	400	4	0,074	400	1,5	360	230	350	62	Al	fig. 3
R3L/500-R	400	4	0,059	500	1,5	360	240	350	68	Al	fig. 3

Reactors with $I_{sat}=2 I_n$ or $I_{sat}=3 I_n$ are also available. Please contact Meth.



IP23

Standard enclosure

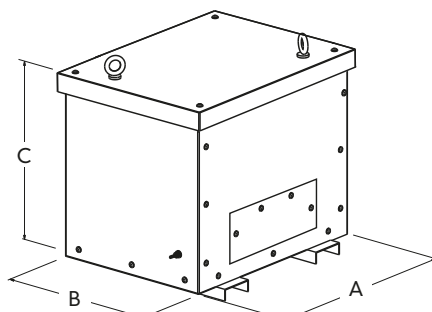

Technical data IP23


CODE	DIMENSIONS (mm)			WEIGHT Kg
	A	B	C	
BOX23-1/-2	580	500	580	-
BOX23-3	640	550	590	-
BOX23-4	740	650	730	-
BOX23-5	860	850	850	-
BOX23-6	1100	1150	1100	-
BOX23-7	1570	1300	1500	-
BOX23-8	1710	1200	1500	-

Technical details:

- 15/10 (box 23-1/2-3-4-5) or 20/10 (box 23-6-7-8) pre-galvanized steel painted with polyester resin
- eye bolts for lifting. From size 23-3 also bottom housing for fork lift or trans pallet lifting
- 2 output metallic plates for cable glands on the same side
- enclosure color: RAL7035



IP44

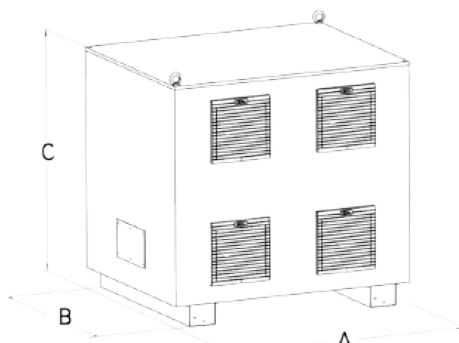

Technical data IP44


CODE	DIMENSIONS (mm)			WEIGHT Kg
	A	B	C	
BOX44-1	610	460	720	35
BOX44-2	810	560	920	56
BOX44-3	1000	800	1000	76
BOX44-4	1300	1000	1400	166
BOX44-5	1600	1300	1500	204

Technical details:

- pre-galvanized steel painted with polyester resin for external
- eye bolts for lifting
- enclosure color: RAL7035



IP55

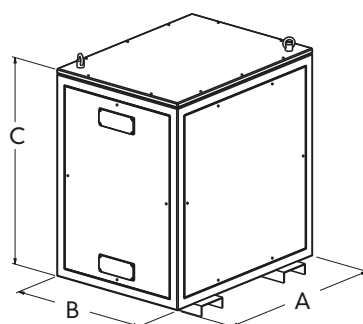

Technical data IP55

CODE	DIMENSIONS (mm)			WEIGHT Kg
	A	B	C	
BOX55-1	600	500	600	28
BOX55-2	700	600	700	37
BOX55-3	850	700	950	75
BOX55-4	1000	700	1000	117
BOX55-5	1200	1050	1100	127

Technical details:

- pre-galvanized steel painted with polyester resin for external
- eye bolts for lifting
- 2 output plastic cable glands on the same side
- enclosure color: RAL7035

38.04 /// **SINGLE-PHASE** **TRANSFORMERS**



meth-group.com



CoC certified products: T1ULF
 For technical and electrical data see page 30

General data

Input voltage	T1Q : 200-440 V
	T1ULF-T1AL : 100-600 V
Output voltage	T1Q : 12-440 V
	T1ULF-T1AL : 12-600 V
Rated power	T1Q : 30-2000 VA
	T1ULF : 30-5000 VA
	T1AL : >5 KVA - 10 KVA

Insulation class	class F
Temperature class	T1Q : class B
	T1ULF-T1AL : class F
Ambient temperature	Ta=40°C
Protection degree	IP 00 - class I
Test voltage	4,2 KV/1'
Terminals	terminal blocks

Application:

Isolating transformer with secondary voltage > 50 V

Safety transformer with secondary voltage ≤ 50 V

They are suitable for any industrial/civil use for the electrical isolation of the input and output sides. Construction in accordance with the following standards:

Standard

CEI-EN 61558,2-4 – isolating transformers

IEC 61558,2-4 – isolating transformers

UL 5085 1-2 – low-voltage transformers

CEI-EN 61558,2-6 – safety transformers

IEC 61558,2-6 – safety transformers



CSA 22.2, No66

T1Q: ENEC marked

T1ULF-T1UL: UL-CSA marked

Certifications

	KEMA FILE 3502609.01-02-03-04-05
	FILE E169331-vol. 2-sec. 1-2
	FILE E169331-vol. 1-sec. 1-2
	FILE E215141-vol. 1-sec. 1

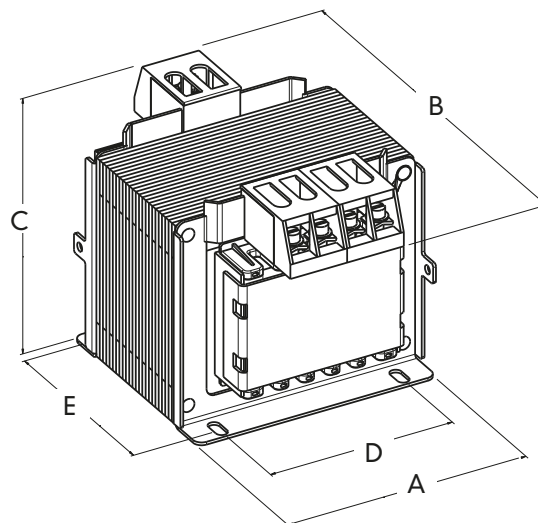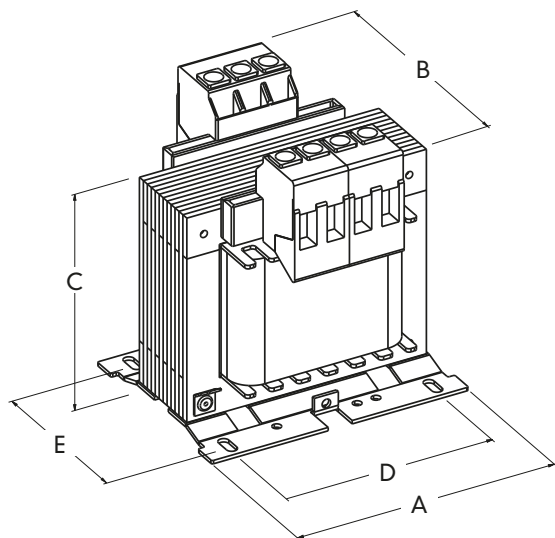

Technical data T1Q

CODE	RATED POWER	APPROVALS	DIMENSIONS (mm)					DIMENSIONS ACCORDING TO DIN STANDARD (mm)					WEIGHT
			A	B	C	D	E	A	B	C	D	E	
T1Q-30...	30		77	81	77	60	43	76	72	89	56	45	1,1
T1Q-50...	50		77	85	77	60	48	76	78	89	56	50	1,2
T1Q-75...	75		86	85	82	70	55	85	85	98	64	54	1,45
T1Q-100...	100		86	95	82	70	65	85	94	98	64	64	2
T1Q-150...	150		98	98	95	80	69	96	92	109	84	70	2,6
T1Q-200...	200		98	113	95	80	84	96	107	109	84	85	3,1
T1Q-250...	250		122	103	110	100	75	121	95	123	90	70	3,6
T1Q-300...	300		122	108	110	100	80	121	105	123	90	80	4,4
T1Q-400...	400		122	118	110	100	90	121	115	123	90	90	5,7
T1Q-500...	500		122	138	110	100	110	121	135	123	90	110	7
T1Q-600...	600		153	116	136	125	93	151	117	140	122	90	7,4
T1Q-800...	800		153	136	136	125	113	151	137	140	122	110	9,8
T1Q-1000...	1000		153	156	136	125	133	151	157	140	122	130	12,1
T1Q-1250...	1250		193	125	176	160	96	193	125	176	160	96	14
T1Q-1500...	1500		193	131	176	160	102	193	131	176	160	102	16
T1Q-2000...	2000		193	151	176	160	122	193	151	176	160	122	20




Fig. 1




Fig. 2




Fig. 3

Technical data T1ULF/T1AUL (industrial control transformers)


CODE	RATED POWER VA	APPROVALS	DIMENSIONS (mm)					DIMENSIONS ACCORDING TO DIN STANDARD (mm)					WEIGHT Kg	FIG.
			A	B	C	D	E	A	B	C	D	E		
T1ULF-30...	30		77	81	77	60	43	76	72	89	56	45	1,1	1-2
T1ULF-50...	50		77	85	77	60	48	76	78	89	56	50	1,2	1-2
T1ULF-75...	75		86	85	82	70	55	85	85	98	64	54	1,45	1-2
T1ULF-100...	100		86	95	82	70	65	85	94	98	64	64	2	1-2
T1ULF-150...	150		98	98	95	80	69	96	92	109	84	70	2,6	1-2
T1ULF-200...	200		98	113	95	80	84	96	107	109	84	85	3,1	1-2
T1ULF-250...	250		122	103	110	100	75	121	95	123	90	70	3,6	1-2
T1ULF-300...	300		122	108	110	100	80	121	105	123	90	80	4,4	1-2
T1ULF-400...	400		122	118	110	100	90	121	115	123	90	90	5,7	1-2
T1ULF-500...	500		122	138	110	100	110	121	135	123	90	110	7	1-2
T1ULF-600...	600		153	116	136	125	93	151	117	140	122	90	7,4	1-2
T1ULF-800...	800		153	136	136	125	113	151	137	140	122	110	9,8	1-2
T1ULF-1000...	1000		153	156	136	125	133	151	157	140	122	130	12,1	1-2
T1ULF-1250...	1250		193	125	182	122	96	-	-	-	-	-	14	1-2
T1ULF-1500...	1500		193	131	182	160	102	-	-	-	-	-	16	1-2
T1ULF-2000...	2000		193	151	182	160	122	-	-	-	-	-	20	1-2
T1ULF-2500...	2500		193	171	182	160	142	-	-	-	-	-	22	2-3
T1ULF-3000...	3000		200	155	300	150	126	-	-	-	-	-	31	3
T1ULF-4000...	4000		240	175	357	205	104	-	-	-	-	-	37	3
T1ULF-5000...	5000		240	185	357	205	114	-	-	-	-	-	40	3
T1AUL-6000...	6000		240	205	357	205	134	-	-	-	-	-	47	3
T1AUL-7500...	7500		280	228	410	233	152	-	-	-	-	-	57	3
T1AUL-10000...	10000		280	252	410	233	175	-	-	-	-	-	75	3



All the above items are also available with transparent varnish

Electrical data Suitable for T1Q - T1ULF - T1AL

RATED POWER VA	LOSSES (W)		EFFICIENCY %	Ucc %	ΔV %	INRUSH CURRENT x In
	load	no load				
30	3	3,2	82,8	9,5	9,6	20
50	3,5	6,7	83,1	11,8	11,8	18
75	4	8	86,2	10,6	10	17
100	5,2	6,8	86,9	8,4	8,2	24
150	6,5	12,5	88,9	9,4	8,1	20
200	8,2	16	89,5	9	7,7	19
250	9,1	17,5	90,5	10,2	7,2	19
300	10,5	18,7	91,2	9,2	6,4	19
400	12,5	28,5	91	10	7,1	18
500	15,6	29	91,9	8,6	5,9	20
600	17	36	92,3	5,6	5,6	23
800	20	46	92,4	5	5,4	22
1000	25	47	93,4	4,5	4,5	23
1250	32	48	93,9	3,9	3,8	22
1500	34	63	93,9	4,3	4,1	22
2000	41	79	94,3	4	3,8	21
2500	50	80	95	3,5	3,2	21
3000	60	97	95	3,4	3,2	20
4000	60	150	95,2	4,1	3,8	20
5000	65	170	95,6	3,7	3,4	18
6000	65	185	96	3,4	3,1	18
7500	75	220	96,2	3,2	2,4	17
10000	100	250	96,7	2,9	2,4	17

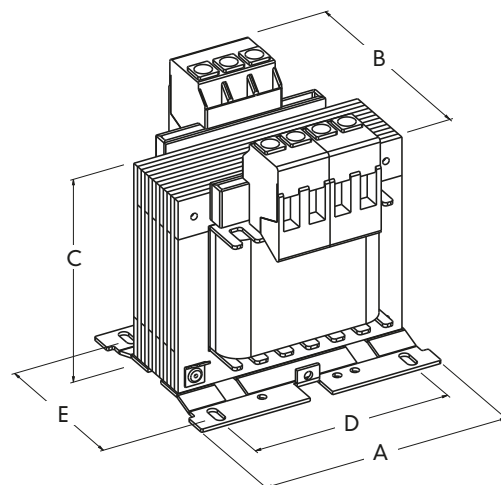

General data

2 input voltage/1 output voltage output in two sides

Input voltage	230-400 V or others upon request
Output voltage	24 V/115 V or others upon request
Rated power	30-5000 VA
Insulation class	class F

Temperature class	class B
Ambient temperature	Ta=40°C
Protection degree	IP 00 - class I
Test voltage	4,2 KV/1'
Terminals	terminal blocks

Application:

Single-phase control, isolating and safety transformers designed combining reliable performance and cost-effectiveness.

They are completely impregnated with resin and have faston or screw earth connection, 4 sqmm terminal blocks, input and output in two sides.

Construction in accordance with the following standards:

Standard

CEI-EN 61558,2-4 – isolating transformers


CEI-EN 61558,2-6 – safety transformers

IEC 61558,2-4 and 2-6

Technical data T1B

CODE	RATED POWER	DIMENSIONS (mm)					WEIGHT	LOSSES (W)		EFFICIENCY	Ucc	ΔV
	VA	A	B	C	D	E		no-load	load	%	%	%
T1B-30...	30	76	68	89	55	40	1	2,1	5,8	76,5	13,2	13
T1B-50...	50	76	73	89	55	45	1,1	2,7	9,5	81	12,5	12,4
T1B-75...	75	76	87	89	55	59	1,3	3,9	11	83,8	12,4	12,7
T1B-100...	100	85	87	95	64	59	1,8	4,7	13,7	84,6	11,8	12,1
T1B-160...	160	98	87	106	84	66	2,2	5,8	17,9	86,5	10,5	10,7
T1B-200...	200	98	97	106	84	76	3	7	22,8	87,1	10,2	10,3
T1B-250...	250	98	107	106	84	86	3,5	8,4	28,3	87,3	10	10,2
T1B-300...	300	108	107	115	90	86	4,1	9,8	31	88,4	9,2	9,3
T1B-400...	400	122	102	121	90	84	4,9	9,4	34	90,3	7,9	7,9
T1B-500...	500	122	117	121	90	99	6	11	34,1	92	6,4	6,5
T1B-600...	600	151	94	142	123	79	7,8	12,3	39	92,2	6,4	6,2
T1B-800...	800	151	114	142	123	99	10,4	17,2	40,4	93,4	4,9	4,8
T1B-1000...	1000	151	124	142	123	109	11,4	19	47,3	93,5	4,6	4,5
T1B-1500...	1500	192	125	176	160	96	14	30	76	93,5	4,9	4,8
T1B-2000...	2000	192	151	176	160	122	20,1	40	88	94	4,4	4,3
T1B-2500...	2500	192	171	176	160	142	23	52	96	94,5	3,8	3,7
T1B-3000...	3000	192	191	176	160	162	26	61	103	94,9	3,5	3,4
T1B-4000...	4000	240	230	230	180	165	45	85	100	95,6	3	3,5
T1B-5000...	5000	240	240	230	180	180	50	90	105	96	3	3,6

Electrical data

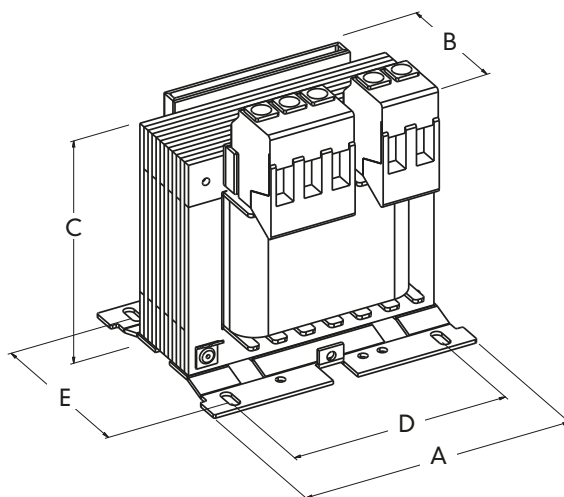

General data

1 input voltage/1 output voltage output in one side

Rated input voltage	230 V or others upon request
Rated output voltage	24 V/115 V or others upon request
Rated power	30-5000 VA
Insulation class	class F
Temperature class	class B

Ambient temperature	Ta=40°C
Protection degree	IP 00 - class I
Test voltage	4,2 KV/1'
Terminals	terminal blocks

Application:

Single-phase control, isolating and safety transformers designed combining reliable performance and cost-effectiveness.

They are completely impregnated with resin and have faston or screw earth connection, 4 sqmm terminal blocks, input and output in the same side.

Construction in accordance with the following standards:

Standard

CEI-EN 61558,2-4 – isolating transformers


CEI-EN 61558,2-6 – safety transformers

IEC 61558,2-4 and 2-6

Technical data T1C

CODE	RATED POWER VA	DIMENSIONS (mm)					WEIGHT Kg	LOSSES (W)		EFFICIENCY %	Ucc %	ΔV %
		A	B	C	D	E		no-load	load			
T1C-30...	30	76	68	89	55	40	1	2,1	5,8	76,5	13,2	13
T1C-50...	50	76	73	89	55	45	1,1	2,7	9,5	81	12,5	12,4
T1C-75...	75	76	87	89	55	59	1,3	3,9	11	83,8	12,4	12,7
T1C-100...	100	85	87	95	64	59	1,8	4,7	13,7	84,6	11,8	12,1
T1C-160...	160	98	87	106	84	66	2,2	5,8	17,9	86,5	10,5	10,7
T1C-200...	200	98	97	106	84	76	3	7	22,8	87,1	10,2	10,3
T1C-250...	250	98	107	106	84	86	3,5	8,4	28,3	87,3	10	10,2
T1C-300...	300	108	107	115	90	86	4,1	9,8	31	88,4	9,2	9,3
T1C-400...	400	122	102	121	90	84	4,9	9,4	34	90,3	7,9	7,9
T1C-500...	500	122	117	121	90	99	6	11	34,1	92	6,4	6,5
T1C-600...	600	151	94	142	123	79	7,8	12,3	39	92,2	6,4	6,2
T1C-800...	800	151	114	142	123	99	10,4	17,2	40,4	93,4	4,9	4,8
T1C-1000...	1000	151	124	142	123	109	11,4	19	47,3	93,5	4,6	4,5
T1C-1500...	1500	192	125	176	160	96	14	30	76	93,5	4,9	4,8
T1C-2000...	2000	192	151	176	160	122	20,1	40	88	94	4,4	4,3
T1C-2500...	2500	192	171	176	160	142	23	52	96	94,5	3,8	3,7
T1C-3000...	3000	192	191	176	160	162	26	61	103	94,9	3,5	3,4
T1C-4000...	4000	240	230	230	180	165	45	85	100	95,6	3	3,5
T1C-5000...	5000	240	240	230	180	180	50	90	105	96	3	3,6

Electrical data

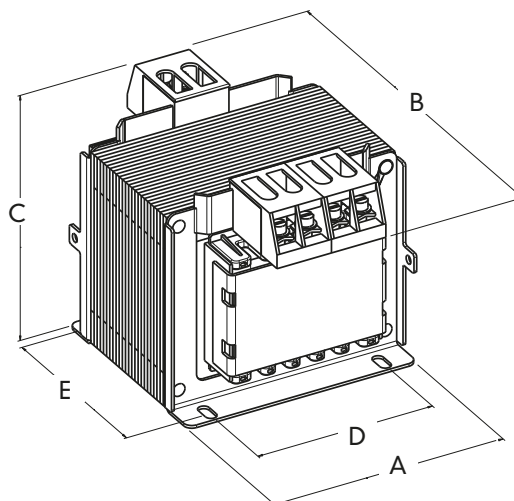

General data

input-output in two sides

Rated input voltage	230-400 V (others upon request)
Rated output voltage	24V or 115V (others upon request)
Frequency	50/60 Hz
Rated power	30-5000 VA
Insulation class	class F
Temperature class	class B

Ambient temperature	Ta=40°C
Operating time	continuous
Protection degree	IP 00 - class I
Terminal protection degree	IP 20
Test voltage	4,2 KV/1'
Terminals	terminal blocks

Application:

Single phase control, isolating and safety transformers designed combining reliable performance and cost-effectiveness. They are completely impregnated with resind. Input and output in two sides. Costruction in accordance with the following standards:

Standard

CEI - EN 61558,2-4 – isolating transformers


CEI - EN 61558,2-6 – safety transformers

IEC 61558,2-4 and 2-6

Technical data T1-IT

CODE	RATED POWER VA	DIMENSIONS (mm)					WEIGHT Kg	LOSSES (W)		EFFICIENCY %	Ucc %	ΔV %
		A	B	C	D	E		no-load	load			
T1-IT-30...	30	76	70	76	55	39	1	2,1	5,8	76,5	13,2	13
T1-IT-50...	50	76	75	76	55	44	1,1	2,7	9,5	81	12,5	12,4
T1-IT-75...	75	76	90	76	55	59	1,3	3,9	11	83,8	12,4	12,7
T1-IT-100...	100	85	88	84	70	61	1,8	4,7	13,7	84,6	11,8	12,1
T1-IT-160...	160	98	94	94	80	64	2,2	5,8	17,9	86,5	10,5	10,7
T1-IT-200...	200	98	104	94	80	74	3	7	22,8	87,1	10,2	10,3
T1-IT-250...	250	98	114	94	80	84	3,5	8,4	28,3	87,3	10	10,2
T1-IT-300...	300	108	112	94	84	83	4,1	9,8	31	88,4	9,2	9,3
T1-IT-400...	400	122	107	110	100	85	4,9	9,4	34	90,3	7,9	7,9
T1-IT-500...	500	122	122	110	100	100	6	11	34,1	92	6,4	6,5
T1-IT-600...	600	151	100	133	125	90	7,8	12,3	39	92,2	6,4	6,2
T1-IT-800...	800	151	120	133	125	110	10,4	17,2	40,4	93,4	4,9	4,8
T1-IT-1000...	1000	151	130	133	125	120	11,4	19	47,3	93,5	4,6	4,5
T1-IT-1500...	1500	192	125	176	160	96	14	30	76	93,5	4,9	4,8
T1-IT-2000...	2000	192	151	176	160	122	20,1	40	88	94	4,4	4,3
T1-IT-2500...	2500	192	171	176	160	142	23	52	96	94,5	3,8	3,7
T1-IT-3000...	3000	192	191	176	160	162	26	61	103	94,9	3,5	3,4

Electrical data

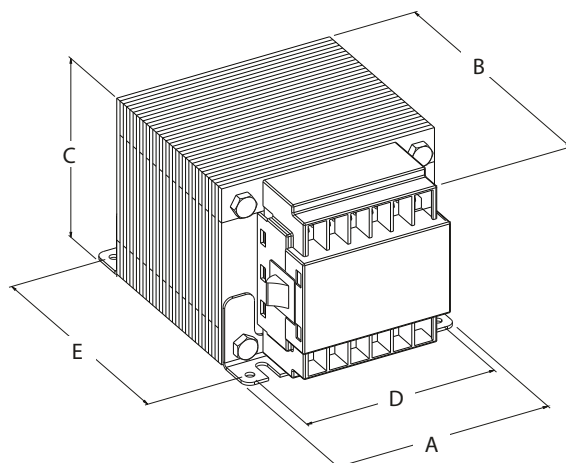

General data

Rated input voltage	230-400 V
Rated output voltage	12/24/48 V (others upon request)
Rated power	30-125 VA
Insulation class	class F
Temperature class	class B

Ambient temperature	Ta=40°C
Protection degree	IP 00 - class I
Test voltage	4,2 KV/1'
Terminals	Faston 6,3 sqmm

Application:

Single-phase isolating and safety transformers suitable for any industrial or civil use for the electrical isolation of the input and output sides with resettable switch on the output.

Construction in accordance with the following standards:

Standard


CEI-EN 61558,2-4 and 2-6 – isolating and safety transformers

IEC 61558,2-4 and 2-6

Technical data T1P

CODE	RATED POWER	DIMENSIONS (mm)					WEIGHT	LOSSES (W)		EFFICIENCY	Ucc	DV
		A	B	C	D	E		no-load	load			
T1P-30	30	75	73	63	55	45	1	2,5	3,8	83,2	11,2	10,9
T1P-50	50	75	73	63	55	45	1,1	2,9	7,1	83,4	12,5	12,4
T1P-63	63	75	83	63	55	55	1,3	3,2	8	84,9	12,2	11,8
T1P-75	75	75	88	63	55	60	1,5	3,8	9,7	85,1	12,1	11,7
T1P-100	100	85	95	72	64	61	1,9	4,5	11,8	86,1	11,8	11,3
T1P-125	125	85	105	72	64	71	2,3	5,5	13,4	87	10,9	10,2

Electrical data

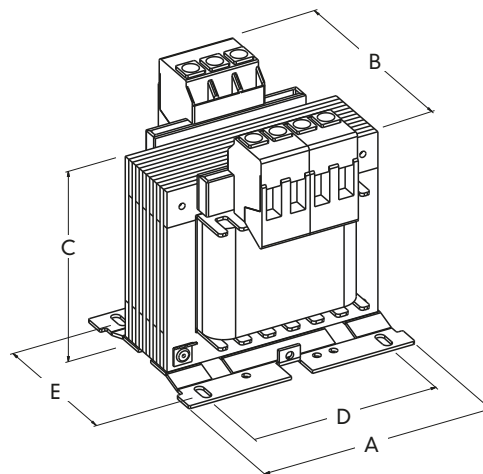

General data

Rated input voltage (standard)	208-230-380-400-420-440-460-480-500-525-550 V
Rated output voltage	2x115 V or 2x12 V or 2x24 V
Rated power	from 150 to 1000 VA
Insulation class	class F

Temperature class	class F
Ambient temperature	Ta=40°C
Protection degree	IP 00 - class I
Test voltage	4,2 KV/1'
Terminals	terminal blocks

Application:

Suitable for any industrial application, where different input voltages are required.

Construction in accordance with the following standards:

Certifications



FILE E169331-vol. 2-sec. 1-2



FILE E215141-vol. 1-sec. 1

Standard

CEI-EN 61558,2-4 and 2-6 – isolating and safety transformers

IEC 61558,2-4 and 2-6


UL 5085 1 and 2 – low voltage transformers

CSA 22.2 No.66


Technical data T1U

CODE	RATED POWER	DIMENSIONS (mm)						WEIGHT
		A	B	C	D	E	Kg	
T1U-150...	150	96	92	105	84	75	2,6	
T1U-250...	250	121	95	125	90	70	3,6	
T1U-400...	400	121	115	125	90	90	5,7	
T1U-500...	500	121	135	125	90	110	7	
T1U-630...	630	151	117	140	120	90	7,4	
T1U-800...	800	151	137	140	120	110	9,8	
T1U-1000...	1000	151	157	140	120	130	12,1	

STANDARD WIRING DIAGRAM

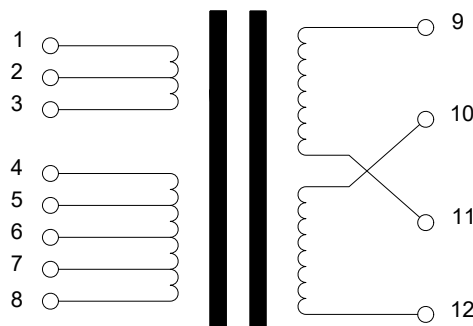

Other configurations available upon request

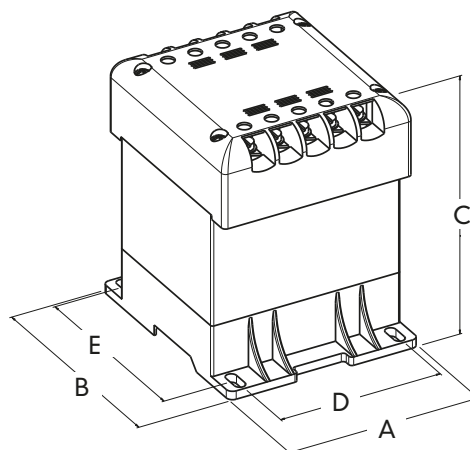

General data

Rated input voltage	230-400±15 V
Rated output voltage	2X12 V or 2x115 V
Rated power	50-400 VA
Insulation class	class F
Temperature class	class B

Protection class	class II
Ambient temperature	Ta=40°C
Protection degree	IP 20
Test voltage	4,2 KV/1'
Terminals	self-lifting screws

Application:

Single-phase isolating and safety transformers suitable for DIN rail or floor screws installation.

Multi-voltage input and output with protection degree IP20.

Protection class II

Construction in accordance with the following standards:


Standard

CEI-EN 61558,2-4 and 2-6 – isolating and safety transformers

IEC 61558,2-4 and 2-6

Technical data T1L

CODE	RATED POWER	APPROVALS	DIMENSIONS					WEIGHT	LOSSES (W)		EFFICIENCY	Ucc	DV
			A	B	C	D	E		NO-LOAD	LOAD	%	%	
T1L-50	50	CE 	89	106	100	68,5	90	1,4	3,5	6,2	84	11,5	11,8
T1L-63	63	CE 	89	106	100	68,5	90	1,5	3,4	8,1	84,7	11,1	11,4
T1L-75	75	CE 	89	106	110	68,5	90	1,8	4,5	8,2	85,7	9,5	9,7
T1L-100	100	CE 	89	106	120	68,5	90	2,1	5,5	10,3	86,3	9,2	9,4
T1L-160	160	CE 	113	115	112	80	99	2,3	5,9	15	87,6	9	9,2
T1L-200	200	CE 	113	115	122	80	99	3	7,1	21,1	87,8	8,9	9,1
T1L-250	250	CE 	113	115	132	80	99	3,5	8,4	26,6	87,9	8,4	8,7
T1L-300	300	CE 	126	136	117	96	121	3,8	8,6	27	89,3	8,3	8,3
T1L-400	400	CE 	126	136	127	96	121	4,5	10,5	34,9	89,9	8,1	8,2

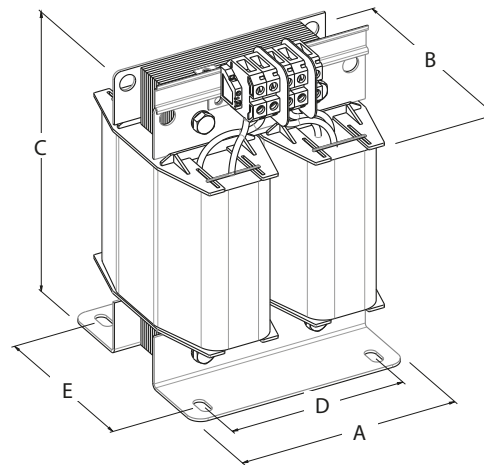

General data

Rated input voltage	up to 600 V
Rated output voltage	up to 600 V
Rated power	from 5 to 80 KVA
Insulation class	class H
Temperature class	class F

Ambient temperature	Ta=40°C
Protection degree	IP 00 - class I
Test voltage	3 KV/1'
Terminals	terminal blocks / bars

Application:

Suitable for any industrial applications for electrical isolation of the input and output side.

Construction in accordance with the following standards:

Standard

CEI-EN 60076 – dry type transformers
IEC -60076 – dry type transformers
UL 5085 1 and 2 – low voltage transformers

Certifications





Insulation System class F - H (upon request)

Technical data T2

CODE	RATED POWER kVA	DIMENSIONS (mm)					WEIGHT Kg	LOSSES (W)		EFFICIENCY %	Ucc %	ΔV %	INRUSH CURRENT x In
		A	B	C	D	E		no-load	load				
T2-5	5	240	210	330	180	120	32	300	93,5	6,4	5	5	20
T2-8	8	240	230	330	180	140	42	340	95,3	4,8	4,8	4,8	20
T2-10	10	280	230	408	240	130	53	390	95,6	4,8	4	4	18
T2-15	15	280	270	408	235	170	72	95	445	96,5	3,7	3,5	15
T2-20	20	320	280	440	265	320	88	115	530	96	3,6	3,5	15
T2-25	25	320	310	440	265	198	110	140	600	97,1	3,1	3,2	14
T2-30	30	400	330	550	300	200	125	150	890	96,6	4,7	4,6	13
T2-40	40	400	360	550	300	220	155	180	1010	97,1	4,6	4,5	12
T2-50	50	400	410	550	300	240	190	230	1060	97,4	3,9	3,8	10
T2-60	60	400	440	550	300	280	225	280	1080	97,8	3,4	3,4	9
T2-80	80	400	480	550	300	320	275	335	1350	97,9	3,3	3,4	9

Electrical data

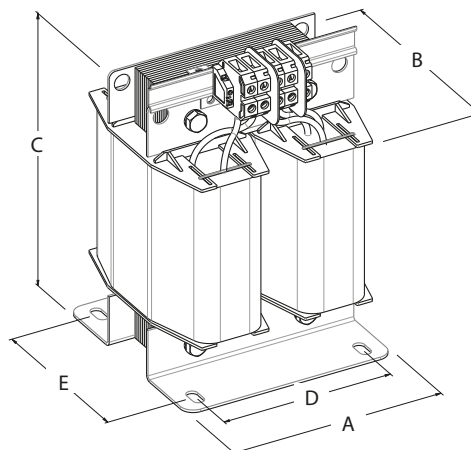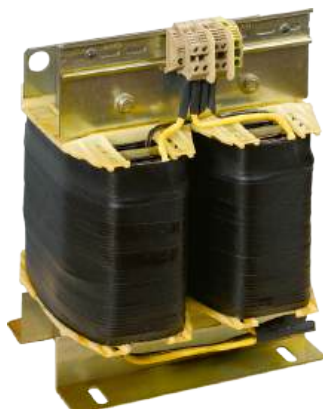

General data

Rated input voltage	230 V
Rated output voltage	115-0-115 V
Rated power	from 2200 VA to 10kVA
Insulation class	class F-H
Temperature class	class B
Ambient temperature	Ta=40°C
Protection degree	IP 00 - class I
Inrush current	12 x In
Short-circuit voltage	3%

Insulation voltage	5KV/1'
No-load current	3%
Leakage current of the output winding to earth	≤0,5 mA
Leakage current of the enclosure to earth	≤ 3,5 mA
Terminals	terminal blocks
Double screen between primary and secondary	
Equipped with a pocket for PT100 upon request	

Application:

Suitable for galvanic separation between the net from the users in medical locations.

Construction in accordance with the following standards:

Standard

CEI-EN 61558, 2-15

IEC 61558, 2-15

Class F/F version is available upon request



Isolating transformer for powering medical locations.

Technical data T2H

CODE	RATED POWER VA	DIMENSIONS (mm)					WEIGHT Kg	LOSSES (W)		EFFICIENCY %	Ucc %	INRUSH CURRENT x In
		A	B	C	D	E		no-load	load			
T2H-2.2	2200	200	155	300	150	126	36	12	65	96,7	3	12
T2H-3.3	3300	240	175	355	180	104	46	15	90	96,9	3	12
T2H-4	4000	240	185	355	180	114	50	20	110	96,9	3	12
T2H-5.5	5500	280	195	355	180	124	56	25	130	97	3	12
T2H-7.5	7500	280	230	410	235	152	66,5	30	190	97,1	3	12
T2H-10	10000	280	240	410	235	162	75	35	230	97,4	3	12

Electrical data

Data referred to 230/115-0-115 V






T5



T6



T7

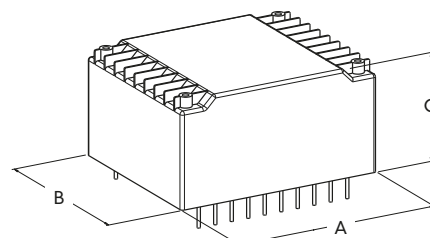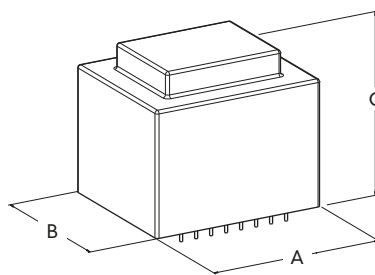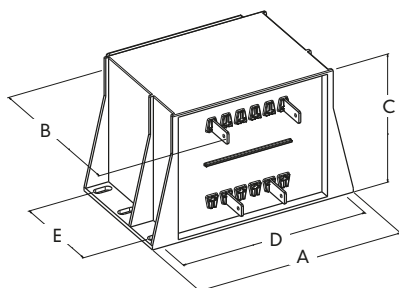

General data

Rated input voltage	from 100 to 250 V
Rated output voltage	from 12 to 42 V
Rated power	T5: from 12 to 70 VA
	T6: from 3,2 to 100 VA
	T7: from 4 to 60 VA

Insulation class	class B
Temperature class	class B
Ambient temperature	Ta=70°C
Protection degree	IP 00
Test voltage	4,2 KV/1"

Application:

Safety transformers encapsulated with epoxy resin suitable for PCB use (T6-T7) or use in critical ambients (T5).

- T5: input and output with 6,3 mm faston
- T6: for PCB insertion with pins with Ø 0,8 mm
- T7: for PCB low profile with pins with Ø 0,8 mm

Construction in accordance with the following standards:

Standard

CEI-EN 61558, 2-6 – safety transformers
IEC 61558, 2-6 – safety transformers
UL-CSA 5085 1-2 – low voltage transformers

Certifications

	ENEC-KEMA File: 3502609 03-04-05
	UL Insulation System class B File E215141

Technical data T5

CODE	RATED POWER	APPROVALS	DIMENSIONS (mm)						WEIGHT	LOSSES (W)	EFFICIENCY	ΔV
	VA		A	B	C	D	E	Kg		no-load	%	%
T5-12	12		82	48	50	68	11	0,42		1	76	15
T5-20	20		82	54	54	74	13	0,56		1,2	87	14
T5-30	30		94	59	60	82	13	0,76		1,5	82	14
T5-35	35		94	59	71	82	36	1,04		2,2	85	9
T5-55	55		105	66	73	93	38	1,32		2,7	86	9,9
T5-70	70		105	66	83	93	48	1,54		3,5	87	8,8



Technical data T6

CODE	RATED POWER	APPROVALS	DIMENSIONS (mm)								WEIGHT	LOSSES (W)	EFFICIENCY	ΔV	FIG.
	VA		A	B	C	D	E	F	G	Kg		no-load	%	%	
T6-3,2	3,2		42	35,5	27,5	-	-	5	25	0,16		0,5	69	25	2
T6-4	4		43	37	33	-	-	5	25	0,18		0,9	69	25	2
T6-5	5		44,2	37,2	32	-	-	5	25	0,19		1	66	27	2
T6-10	10		50,2	42,2	34,5	-	-	5	27,5	0,28		1,2	71	24	2
T6-12	12		50,2	42,2	38,1	-	-	5	27,5	0,32		1,4	73	22	2
T6-16	16		74	47,5	40	65	-	5	32,5	0,42		1,6	72	24	1
T6-20	20		81,5	53,7	48	72,5	43,5	5	32,5	0,54		1,9	80	14	1
T6-25	25		81,5	53,7	53	72,5	43,5	5	32,5	0,62		2,2	81	13	1
T6-30	30		81,5	53,7	58	72,5	43,5	5	32,5	0,72		2,4	83	12	1
T6-35	35		87,5	58,6	58	78	48	5	35	0,78		2,6	84	12	1
T6-50	50		87,5	58,6	68	78	48	5	35	1,05		3,2	85	11	1
T6-60	60		102	69	65	90	57	7,5	39	1,35		3,4	86	11	1
T6-100	100		102	69	75	90	57	7,5	39	1,6		4,5	86	13	1

Electrical data




fig. 1






fig. 2



Technical data T7

CODE	RATED POWER	APPROVALS	DIMENSIONS (mm)				WEIGHT	LOSSES (W)	EFFICIENCY	ΔV	FIG.
	VA		A	B	C (H)	Kg		no-load	%	%	
T7-4	4		53	44	17,6	0,16		1,2	55	40	1
T7-6	6		53	44	22,6	0,18		1,1	63	33	1
T7-10	10		53	44	28,6	0,19		1,1	70	26	1
T7-14	14		68	57,5	24,2	0,28		1,6	70	26	2
T7-18	18		68	57,5	27,2	0,32		1,4	74	23	2
T7-24	24		68	57,5	31	0,42		1,7	76	21	2
T7-30	30		68	57,5	35,5	0,54		1,8	78	19	2
T7-40	40		83,5	69	37	0,62		2,2	78	19	3
T7-60	60		83,5	69	46	0,72		3,1	78	17	3

Electrical data




fig. 1




fig. 2




fig. 3

OTHER TRANSFORMERS



**Auto-transformers
with box IP23**



**12-pulse
transformers**



**LV/MV three-phase
transformers**



**Single-phase transformers
with fast-on terminals**



**Single-phase transformers
with vertical connectors**



**Single-phase
auto-transformers**



**MV three-phase reactors
for short-circuit current**

Indications:

the following technical information are a guideline for the correct use of transformers in various voltage fields. The differences in the construction of the transformers are determined by the installation and equipment requirements. We summarize here the main definitions set down in EN 61558.1 and part 2 standard. Other standards which we refer to are: CEI 14-5, 14-8, EN 60076-1 (power transformers), UL 5085-1-2-3.

Transformers

Isolating transformer: suitable for limiting risks caused by contact between the earth and the live parts that can give an electric shock if the isolation is broken or damaged.

Primary voltage: 1000V max - Secondary voltage: max 500V no-load - Frequency: 500Hz max - Rated power: 25kVA if single-phase, max. 40kVA if three-phase. Type of isolating: double or reinforced.

Safety transformer: isolating transformer suitable for feed circuits of low safety voltage. Primary voltage: 1000V max - Secondary voltage: 50V max. no-load - frequency 500Hz - Rated power: 10kVA if single-phase, max. 16kVA if three-phase. Type of isolating: double or reinforced.

Rated Ambient Temperature:

this is the temperature surrounding the transformer. If not otherwise specified, the rated ambient temperature is 40 °C. Particular care should be taken when the temperature is higher. It should not exceed the values laid down in the table below. The core power must be adapted to approximately the values given below:

Rated Ambient Temperature	Rated power x factor
40 °C	1
50 °C	0.92
60 °C	0.84
70 °C	0.75

Over-temperature: this is the temperature which is verified in the transformer when it is working normally. In particular, in the windings, depending on the type of isolating materials and the rated ambient temperature, the following values must not be exceeded:

Maximum excessive temperatures for winding with $t_a=40\text{ °C}$
 $A=60\text{ °C}$ - $E=75\text{ °C}$ - $B=80\text{ °C}$ - $F=100\text{ °C}$ - $H=125\text{ °C}$

Rated Input Voltage: network voltage feed of the transformer.

Unless otherwise agreed, the maximum limit displayed is a value of 1.1 times the rated input voltage, as long as it does not cause damage to the continuous running of the transformer.

No-load Current: this is the input current of the no-load transformer with rated input voltage and frequency. The value of the no-load current is mainly effected by the properties of the used magnetic core laminations and can oscillate, even between transformers from the same production due to practical effects. An oscillation of - 10%/+20% with respect to the rated value is acceptable.

Protection Class:

the equipment has built-in safety to protect against dangerous electrical currents.

Class I: all the metallic parts accessible from the transformer are insulated from the voltage parts by basic insulation and added safety measures consisting of a safety conductor within the electrical system of the installation.

Class II: all the metallic parts accessible from the transformers are separated from the voltage parts with double or reinforced isolating. The transformer must not be connected to the earth.

Insulation Class:

Max insulation system temperature	Max temperature on winding with $T_a=40\text{ °C}$
A (105 °C)	60 °C
E (120 °C)	75 °C
B (130 °C)	80 °C
F (155 °C)	100 °C
H (180 °C)	125 °C

Input Winding (Primary): particular attention should be paid if, rather than only one input voltage, additional voltage inputs are required. In this case an increase of the core power is necessary. For example:

Input voltage	Rated power x factor= scaling of the core power	
	1 section	2 sections
230	1	1
230+400	1.23	1.52
230+500	1.26	1.49
400+440	1.06	1.12
400+440+500	1.12	1.25

Rated Output Voltage: this is the output voltage of the transformer at rated frequency, rated input voltage, with a rated output current at a rated power factor (=1). This is obtained when the transformer is running in continuous service conditions with a rated ambient temperature. If not otherwise agreed, a tolerance of $\pm 5\%$ is acceptable. For short-circuit proof transformers it is $\pm 10\%$ for construction.

No-load Voltage: this is the secondary voltage of the transformer in no-load conditions, at primary voltage and rated frequency. This formula can be found starting from:

$$\text{voltage drop \%} = \frac{\text{No-load voltage} - \text{rated secondary voltage}}{\text{No-load voltage}} \times 100$$

EN 61558.1 standard gives the following values for isolation and safety of transformers:

Nominal % differences between secondary no-load and loaded voltage:		
up to 10 VA	100	Note: for insulating transformers up to 63VA:20%
from 10VA to 25 VA	50	
over 25 VA to 63 VA	20	For control transformers in accordance with EN 61558.1 part CEI 96-3 standard the max. difference is 10%
over 63 VA to 250 VA	15	
over 250 VA to 630 VA	10	
over 630 VA	5	

Output Winding: it means that in case of derivation output, the current is calculated in reference to the highest voltage, if not differently specified. In case of more windings, due to the quantity of isolation, it could be necessary to increase the core power.

Rated Power: this is the product of the rated secondary voltage for the rated secondary current. For three-phase transformers it is $\sqrt{3}$ times the product of the rated secondary voltage for the rated secondary current. For more secondary windings it is the sum of the product of rated secondary voltage for the rated secondary current of the circuits charged simultaneously.

Autotransformer: this is a transformer with common input and output windings, without galvanic isolation between the windings. The relative power is given by the formula:

$$P_{app} = P_{nom} \left(1 - \frac{V_1}{V_2}\right)$$

where P_{app} = power (VA)
 P_{nom} = rated power (VA)
 V_1 = lower voltage (V)
 V_2 = higher voltage (V)

Short Circuit Resistance: here is the classification that the standard EN 61558.1 applies to short circuit proof transformers:

a) **Transformer not inherently short-circuit proof:** this is a transformer in which has been designed to resist extreme temperatures using a external protective device not supplied with the transformer (e.g. external fuses).

b) **Short-circuit proof Transformer:** this is a transformer in which the over-temperature can not exceed the limits specified when the transformer is short circuited, and can function normally after the removal of the short circuit.


- **Transformer short-circuit proof with specific construction:** this is a transformer which comes with a protective device inside which opens the primary or secondary circuit or reduces the current in case of short circuit (e.g. PTC, bi-metal).
- **Transformer short-circuit proof not with specific construction:** this is a transformer which, in the absence of protective devices, in case of short circuit, does not exceed the temperature limits (e.g. small transformer with high internal resistance).
- **Fail-safe transformer:** this is a transformer which after abnormal use, stops working without placing the user at risk (e.g. transformer with thermo-fuse included).

De-rating Tables: the working conditions of rated power (P_n) are referred to the following parameters:


- Continuous service
- Frequency: 50Hz...60Hz
- Protection degree: IP00
- Installation up to 1000m a.s.l.
- Ambient temperature: $t_a=40^\circ\text{C}$

Other conditions are allowed according to the following tables:

ALTITUDE:

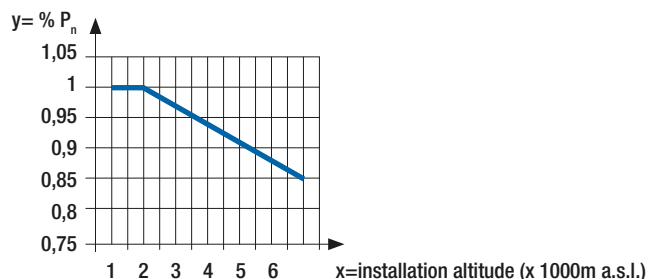

AMBIENT TEMPERATURE:

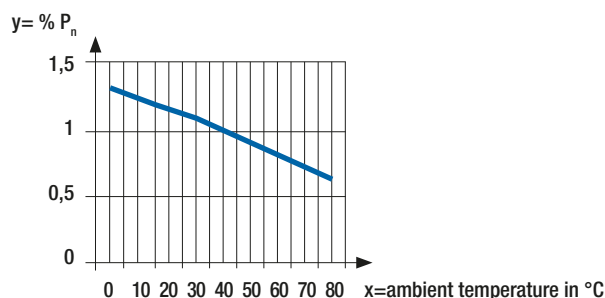

Note: tables are in general. Upon request can be provided tables for the various types of transformers.

Intermittent Service: the required power could be calculated for different intermittent services starting from the following parameters:

- rated power (P_n)
- working time (T_{on})
- resting time (T_{off})

Intermittent rated power P_{int}

$$P_{int} = P_n \times \sqrt{\frac{T_{on}}{T_{on} + T_{off}}} \times 1,1$$

For example: rated load = 500VA

T_{on} = 10'

T_{off} = 20'

$$P_{int} = 500 \times \sqrt{\frac{10}{10+20}} \times 1,1$$

350VA transformer is enough.

Protection Devices: as general rule the transformer should be protected against short-circuits on the primary, against over-loads on the secondary. In both cases with delaying fuses (T) or with magneto-thermal switches with delayed tripping curve. Secondary protection calculation (against over-load) has not problems: EN 61558-1 standards provide a tolerance of ±10% on the rated secondary current and in any case on the external label it is indicated the fuse dimension. The primary protection calculation (against the short-circuit) is more difficult. It should be noted that a current peak (I_e) is generated at insertion moment which is 20-30 times I_n for about 10ms without protection that will occur in case of short-circuit.

It is necessary to know the short-circuit current, considering also the farthest point of the line transformer-user.

Known data:

V₂= transformer output voltage

V_{cc}= short-circuit voltage in % (see catalogue)

P_n= transformer rated power

L= line length in meters

S= section of the conductor in m²

$$I_{2cc} = \frac{V_2}{\frac{V_2^2}{P_n} \times \frac{V_{cc}(\%)}{100} + \frac{0,036 \times L (m)}{S (mm^2)}}$$

In general it is enough to consider a protection calculated as 1,5-2,5xI_n prim.

The table below is for single-phase transformers from 50VA to 1000VA with voltages 230-400/24V or 115V

Single-phase transformers - Protections with delaying fuses "T" serie

Protection against short-circuit

P _n	Input voltage		Output voltage	
	230V	400V	24V	115V
50	0,50	0,315	2	0,40
75	0,80	0,40	3,15	0,63
100	1	0,63	4	1
150	1,50	0,80/1	6,3	1,25
200	2	1,25	8	1,6
250	2,50	1,6	10	2
300	3	1,6	12	2,5
400	3,15	2,5	15	3,15/4
500	4	3	25	4/5
630	5	4	-	5/6,3
800	6	5	-	8
1000	8	6,30	-	8/10

Our strength lies in the people.

Our tradition of excellence, globally certified, is based on the constant commitment to updating our products to meet requirements and standards. All thanks to the experience and dedication of our highly specialized team.



METH GROUP

METH srl

PLANT 1

Via Fondovilla, 84/F /// 36010 Carrè (VI) - Italy

Tel. +39.0445.891799 /// Fax +39.0445.891841

info@meth-group.com

Italian market sales: commerciale@meth-group.com

International market sales: export@meth-group.com

/// **www.meth-group.com** ///



METH ELECTRIC TRANSFORMERS KFT

PLANT 2

8800 Nagykanizsa, Csengery utca 102 – Hungary

Tel +36 93900278 /// Fax +36 93900279



METH ELECTRIC TRANSFORMERS KFT

PLANT 3

8800 Nagykanizsa - Vágóhídi út 0481– Hungary

